



OMNI ®



Product Catalogue
產品目錄

2017-18

Company Profile 公司簡介

Company background 公司背景

Omni Electrical & Lighting is wholly owned by Yatai International Corporation, which celebrates its 20th anniversary in 2016. Based in Asian with 100 thousand square feet world-class manufacturing facilities and thousands of employees, Yatai is one of the few names in lighting & electrical industry with capabilities in R&D, manufacturing, selling and branding under one roof.

歐麗電業母公司 - 亞泰國際股份有限公司至今成立已超過 20 年，一直扎根亞洲，面向世界，成為區內生產優質照明和專業電業產品的企業。除了擁有占地達 10 萬平方呎、數千名員工的現代化生產設備的廠房外，亦是亞洲少數電業品牌能做到研發、生產、銷售及品牌一站式管理，絕對傲視同群！

Vision statement 願景

To become one of the most trusted, pioneer Asian's world brand in electrical & lighting, as the leading supplier of safe, innovative, customer-centric, eco-friendly and superior products at affordable price.

成為亞洲區內世界級電工及照明品牌，作為業內領先供應商，提供安全、創新、以客為主、環保及大眾化的優質產品。

Core Value 核心價值

Yatai and Omni continue to evolve and expand its business while remaining true to their core value represented by the eight petals of Omni logo, namely: accountability, integrity, teamwork, competence, quality, commitment, innovation and passion to continuously satisfy consumer needs.

亞泰及歐麗本著其核心價值發展至今。而歐麗標誌上的八片花瓣，正代表了我們八個核心價值：問責，誠信，團隊合作，能力，質量，承諾，創新和激情，以不斷滿足消費者的需求。

Mission statement 營運宗旨

To create long-term benefits for customers by delivering excellent products, creating value and services to Asian countries through innovation and cutting-edge technology, state-of-art manufacturing facilities, professional teams and superior craftsmanship.

以卓越的產品及服務、創新及先進的技術、完備的生產設備、專業的團隊及優秀的工藝為亞洲區客戶帶來長遠的利益及增值。



Quality Assurance 質量監控

We value quality assurance a lot and put into action to obtain various certifications issued by worldwide professional authorities, including IEC, DAF by German, UL/FCC by US, Energy Star & CE by EU, JIS by Japan and 3C by China in lighting products. For electrical products, we are accredited by HKEP(S)R, BS1363A by UK, CE by EU, 3C by China, SS167 by Singapore, MS589 by Malaysia and IEC. Benefit from high level of QA system, Omni delivers trustworthy products with premium quality and safety standard.

我們非常重視產品及服務的質量，以國際級水平為標準，照明產品榮獲國際標準電工委員會 IEC、德國 DAF 實驗室、美國 UL/FCC、Energy Star、歐盟 CE、日本 JIS、中國 3C 等品質標準和認證，主要產品獲得全球超過 40 個主要國家認證。電工產品更榮獲香港 HKEP(S)R、英國 BS1363A、歐洲 CE、中國 3C、新加坡 SS167、馬來西亞 MS589、符合國際標準電工委員會 IEC 等權威認證，產品無論在質量及安全上都是無容置疑。

Innovation 創新意念

Innovation and new product development is our foundation strategy supported by enormous investment. To uplift the efficiency of R&D, we have 300 product engineers, 10 specialized testing laboratories for product function and environmental standard. Our factory is operating and managed by ERP system with up-to-date facilities to ensure all products attaining highest international standard. As a leading company in Asia, we have more than 300 patents in professional electrical low voltage power adaptors covering various areas of products.

我們在產品開發及創新方面投入大量資源，包括擁有設計工程師逾三百名的開發團隊，建立了十個專門的技術研發、性能檢測及環保檢測等專業實驗室，提升研發的成效。全廠採用 ERP 系統嚴格管理生產流程，並不斷投入和更新設備系統，使我們有能力在最快時間完成設計和發展新產品，令產品性能指標達到國際最高標準。在電工產品方面，歐麗擁有 300 多項專業低壓電源适配器的專利，涵蓋不同類別產品。

Awards and Endorsement 獎項及認證

- Asia Excellence Award 2012, 2014 & 2016
- Roadshow Best Loved Brands Award 2014
- Registered supplier of HKSAR EMSD (No.:S0685)
- 榮獲 2012, 2014 及 2016 年度亞洲卓越品牌大獎
- 榮獲 ROADSHOW 一路最愛品牌大獎 2014
- 為香港機電工程署註冊供應商 (No.: S0685)





Contents 目錄

LED General Lighting Series LED 一般照明系列

LED A Bulb LED A 形燈膽.....	P.01-02
LED Globe Bulb LED 球形燈.....	P.03-04
LED Pinlight LED 插拔管燈.....	P.05-06
LED Candle Bulb LED 蠟燭燈.....	P.07-08
LED MR16 Spotlight LED MR16 射燈.....	P.09-10
LED Flat Lamp LED 簡約頂燈.....	P.11-12
LED High Power Bulb LED 高效能燈膽.....	P.13-14
LED T8 Tube LED T8 光管.....	P.15-20
LED Par Lamp LED 射燈.....	P.21-22
LED Red Bulb LED 紅燈膽.....	P.23-24
LED Infinite Lamp LED Infinite 燈.....	P.25-26
LED Dimmable Bulb LED 調光燈膽.....	P.27-28

LED Industrial and Commercial Lighting Series LED 工業及商業照明系列

LED Integrated Recessed Downlight LED 一體化嵌入式筒燈.....	P.29-30
LED High Bay Lamp LED 高樓底燈.....	P.31-32
LED Panel Light LED 平板燈.....	P.33-34
LED Slim Panel Light LED 纖巧平板燈.....	P.35-36
LED Strip Light LED 燈帶.....	P.37-42

LED Outdoor Lighting Series LED 戶外照明系列

LED Weatherproof Lighting LED 防水燈.....	P.43-44
LED Weatherproof Flood Light LED 防水泛光燈.....	P.45-48
LED Weatherproof Slim Flood Light LED 纖巧防水泛光燈.....	P.49-50
LED Weatherproof Multi Function Flood Light LED 多功能防水泛光燈.....	P.51-52

LED Roadway Lighting Series LED 道路照明系列

LED Street Light LED 街道燈.....	P.53-54
LED Road Light LED 公路燈.....	P.55-56
LED Tunnel Light LED 隧道燈.....	P.57-58

LED Emergency Lighting Series LED 應急照明系列

LED Automatic Emergency Light LED 自動應急燈.....	P.59-60
Emergency Battery 應急電池.....	P.61-62

LED Home Lighting Series LED 家居照明系列

LED Eye Protection Table Lamp LED 護眼檯燈.....	P.63-66
---	---------

Electrical Product Series 電工產品系列

Safety Extension Sockets 安全拖板.....	P.67-68
13A British Standard Sockets 13A 英國標準插頭.....	P.69-70
Universal Travel Adapter 環球旅行轉插.....	P.71-72

Appendix 附錄

Symbol Index 標籤索引.....	P.73
------------------------	------



- Up to 85% energy savings when compare to incandescent 比烏絲燈膽節能高達 85%
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達 20,000 小時
- Classic design with gentle lighting, perfect fit with lampshade
外型經典，適用於家居燈飾，營造柔和光線


LED
Lite

LED A Bulb LED A 形燈膽





MODEL 型號	CT 色溫	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED A50 Bulb 燈膽 - 6W					
LLA50E27-6W-DL	6500K	500lm	E27	>80	48pcs/ctn.
LLA50E27-6W-WW	2700K	450lm			
LED A60 Bulb 燈膽 - 9W					
LLA60E27 / B22-9W-DL	6500K	800lm	E27 / B22	>80	48pcs/ctn.
LLA60E27 / B22-9W-WW	2700K	750lm			
LED A65 Bulb 燈膽 - 12W					
LLA65E27-12W-DL	6500K	1100lm	E27	>80	48pcs/ctn.
LLA65E27-12W-WW	2700K	1000lm			



WATT 瓦數		6W	9W	12W
SIZE 呎吋	A	50mm	60mm	65mm
	B	92mm	110mm	125mm

LED A Bulb VS Incandescent
LED A 形燈膽 烏絲膽

6W → 40W
9W → 60W
12W → 80W

IEC 62471

IEC 62560

CE

20,000 Hours

270° SUPER WIDE ANGLE

220V-240V~50/60Hz

UP TO 85% ENERGY SAVINGS

10 YEARS OF LIFE

NO UV/IR

SAFE EASY TO USE

RoHS Compliant

Waste disposal icon

A Bulb
A 形燈膽



- Wide beam angle, illuminate any corner of the home 廣闊發光角度，照亮家居每個角落
- Up to 85% energy savings when compare to incandescent 比烏絲燈膽節能高達 85%
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達 20,000 小時


LED
Lite

LED Globe Bulb LED 球形膽





MODEL 型號	CT 色溫	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED G45 Globe Bulb 球形膽 - 5W					
LLG45E27 / E14-5W-DL	6500K	420lm	E27 / E14	>80	48pcs/ctn.
LLG45E27 / E14-5W-WW	2700K	400lm			
LED G95 Globe Bulb 球形膽 - 12W					
LLG95E27 / B22-12W-DL	6500K	1050lm	E27 / B22	>80	24pcs/ctn.
LLG95E27-12W-WW	2700K	1000lm	E27		
NEW LED G120 Globe Bulb 球形膽 - 18W					
LLG120E27 / B22-18W-DL	6500K	1600lm	E27 / B22	>80	12pcs/ctn.
LLG120E27-18W-WW	2700K	1500lm	E27		



WATT 瓦數		5W	12W	18W
SIZE 呎吋	A	45mm	95mm	120mm
	B	82mm	127mm	160mm

LED Globe Lamp LED 球形膽 VS Incandescent 烏絲膽

5W → 35W
12W → 90W
18W → 120W

IEC 62471 IEC 62560 CE

20,000 Hours 270° SUPER WIDE ANGLE 220V-240V~50/60Hz

UP TO 85% ENERGY SAVINGS 10 YEARS OF LIFE NO UV/IR

SAFE EASY TO USE RoHS Compliant

Globe Bulb
球形膽



- Ultra-slim design for different lampshade
纖巧時尚設計，易於配合不同燈飾及燈具
- 360° wide beam angle 360° 廣闊發光角度
- 50% energy savings when compared to CFL pinlights
比傳統慳電膽節能50%
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達20,000小時




LED
Lite

LED Pinlight LED 插拔管燈


* Registered Patent 註冊專利:
Appearance Patent 外觀專利設計 ZL201430334974.4
China Utility Model Patent 中國實用新型專利 ZL2014205203.9




MODEL 型號	CT 色溫	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED Pinlight 插拔管燈 - 7W					
Applicable to 6-inch downlight casing 適用於6吋筒燈外殼					
LPLE27 / E14 / G24D-7W-DL	6500K	600lm	E27 / E14 / G24D	>80	48pcs/ctn.
LPLG24D-7W-CW	4000K	580lm	G24D		
LPLE27 / E14 / G24D-7W-WW	2700K	550lm	E27 / E14 / G24D		
LED Pinlight 插拔管燈 - 9W					
Applicable to 6-inch downlight casing 適用於6吋筒燈外殼					
LPLE27 / G24D-9W-DL	6500K	840lm	E27 / G24D	>80	48pcs/ctn.
LPLE27 / G24D-9W-CW	4000K	830lm			
LPLE27 / G24D-9W-WW	2700K	810lm			
LED Pinlight 插拔管燈 - 12W					
Applicable to 8-inch downlight casing 適用於8吋筒燈外殼					
LPLG24D-12W-DL	6500K	1100lm	G24D	>80	48pcs/ctn.
LPLG24D-12W-CW	4000K	1050lm			
LPLG24D-12W-WW	2700K	1000ml			



WATT 瓦數		7W	9W	12W
SIZE 呎吋	A	38mm	38mm	38mm
	B	104mm	108mm	151mm



7W → 11W
9W → 15W
12W → 18W





- Elegant appearance with brightness flashing 外型優雅，閃爍明亮
- Up to 90% energy savings when compare to incandescent 比烏絲燈膽節能高達 90%
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達 20,000 小時


LED
Lite

LED Candle Bulb LED 蠟燭燈






MODEL 型號	CT 色溫	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED Frosted Cover Candle Bulb 磨砂面蠟燭燈 - 6W					
LCF35E14-6W-DL	6500K	400lm	E14	>80	48pcs/ctn.
LCF35E14-6W-WW	2700K	370lm			
LED Clear Cover Candle Bulb 清面蠟燭燈 - 6W					
LCC35E14-6W-DL	6500K	400lm	E14	>80	48pcs/ctn.
LCC35E14-6W-WW	2700K	370lm			



WATT 瓦數		6W
SIZE 呎吋	A	35mm
	B	99mm



6W → 40W



Candle Bulb
蠟燭燈



- 90% energy savings when compared to halogen bulb 比石英膽節能高達 90%
- UV and IR free 不含紫外線及紅外線
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達 20,000 小時
- 38°, 60° and 100° beam angle available 備有 38°、60° 及 100° 發光角度供選擇

LED
Lite

LED MR16 Spotlight LED MR16 射燈





MODEL 型號	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
-------------	----------	--------------------	--------------	-------------------	------------	---------------

NEW LED MR16 Spotlight 射燈 - 5W

LFGU10/GU5.3-5W-4K-38	4000K	38°	400lm	GU10/GU5.3	>80	48pcs/ctn.
LFGU10/GU5.3-5W-3K-38	3000K		380lm			
LFGU10/GU5.3-5W-2K-38	2700K		380lm			
LFGU10/GU5.3-5W-4K-100	4000K	100°	400lm	GU10/GU5.3		
LFGU10/GU5.3-5W-3K-100	3000K		380lm			
LFGU10/GU5.3-5W-2K-100	2700K		380lm			

NEW LED MR16 Spotlight 射燈 - 8W

LFGU10/GU5.3-8W-4K	4000K	38°	630lm	GU10/GU5.3	>80	48pcs/ctn.
LFGU10/GU5.3-8W-3K	3000K		600lm			
LFGU10/GU5.3-8W-2K	2700K		600lm			

LED MR16 Spotlight 射燈 - 12W*

LFGU10-12W-4K	4000K	60°	980lm	GU10/GU5.3	>80	48pcs/ctn.
LFGU10-12W-3K	3000K		950lm			
LFGU10-12W-2K	2700K		950lm			



5W 38°








5W 100°




8W 38°



12W 60°



WATT 瓦數		5W GU5.3	5W GU10	8W GU5.3	8W GU10	12W GU10
SIZE 呎吋	A	47mm	47mm	50mm	50mm	50mm
	B	45mm	55mm	49mm	56mm	80mm



5W → 35W
8W → 50W
12W → 80W

IEC
62471

IEC
62560

CE

20,000
Hours

220V-240V~
50/60Hz

UP TO
90%
ENERGY
SAVINGS

10
YEARS OF LIFE

NO
UV/IR

RoHS
Compliant

SAFE
EASY TO USE

RoHS
Compliant

DC
12V

GU5.3

只適用於

DC
12V

* Indent Order 需預訂

Recommended Fixture 推介燈具:

MODEL 型號	DIMENSION 呎吋	CUT OUT SIZE 開孔呎吋	PACKING 包裝
Round Downlight Casing 圓形筒燈外蓋			
DLR-MR16A1	90mm X 20mm	70mmØ	60pcs/ctn.

MODEL 型號	INPUT 輸入	OUTPUT 輸出	Tc 表面溫度	Ta 環境溫度	PACKING 包裝
LED Driver 驅動器					
LDD-030	95-240V~50/60Hz	12V=1A 1-10W	75°C	40°C	100pcs/ctn.



IEC
61347



- Wide range of illumination 照明範圍廣闊
- 85% energy savings 節能高達 85%
- Easy installation and dismantle 簡易安裝及拆除
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- 20,000 Hours of operations 壽命可達 20,000 小時


LED
Lite

LED Flat Lamp LED 簡約頂燈






MODEL 型號	CT 色溫	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
NEW LED Flat Lamp 簡約頂燈 - 15W					
LFE27 / B22-15W-DL	6500K	1350lm	E27 / B22	>80	10pcs/ctn.
LFE27-15W-WW	2700K	1300lm	E27		
LED Flat Lamp 簡約頂燈 - 22W					
LFE27 / B22-22W-DL	6500K	1900lm	E27 / B22	>80	10pcs/ctn.
LFE27-22W-WW	2700K	1800lm	E27		
LED Flat Lamp 簡約頂燈 - 30W					
LFE27 / B22-30W-DL	6500K	2500lm	E27 / B22	>80	6pcs/ctn.
LFE27-30W-WW	2700K	2400lm	E27		



WATT 瓦數		15W	22W	30W
SIZE 呎吋	A	143mm	201mm	310mm
	B	112mm	140mm	130mm



15W → 25W
22W → 32W
30W → 42W



Flat Lamp
簡約頂燈





- Higher light output 極高光源輸出
- Wider beam angle up to 360°
發光角度廣闊，可達 360 度
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低
- Over 30,000 Hours of operations 壽命可達 30,000 小時以上



LED High Power Bulb LED 高效能燈膽



MODEL 型號	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED High Power Pillar Lamp 高效能柱燈 - 20W*			IEC 60061	IEC 62031	40,000 Hours	
LM65E27-20W-DL	6500K	360°	2100lm	E27	>80	24pcs/ctn.
LM65E27-20W-VWW	2700K		2000lm			
NEW LED High Power Globe Bulb 高效能球膽 - 40W*			30,000 Hours			
LMA120E27-40W-DL	6500K	180°	3200lm	E27	>80	25pcs/ctn.
LMA120E27-40W-VWW	3000K		2800lm			



Product 產品		LED High Power Pillar Lamp 高效能柱燈 - 20W	LED High Power Globe Bulb 高效能球燈 - 40W
SIZE 呎吋	A	64.5mm	120mm
	B	184mm	200mm


Recommended Fixture 推介燈具:

Aluminium diffuser
鋁散光罩


Model No 型號: LMA120-D
Size 呎吋: Φ350mm




MODEL 型號	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED High Power Ceiling Lamp 高效能天花燈 - 50W*						
LHP150E27 / E40-50WDL	6500K	120°	4500lm	E27	>80	6pcs/ctn.
LHP150E27 / E40-50WCW	4000K		4400lm			
LED High Power Ceiling Lamp 高效能天花燈 - 75W*						
LHP170E27 / E40-75WDL	6500K	120°	6500lm	E27	>80	6pcs/ctn.
LHP170E27 / E40-75WCW	4000K		6200lm			



Product 產品		LED High Power Ceiling Lamp 高效能天花燈 - 50W		LED High Power Ceiling Lamp 高效能天花燈 - 75W	
Lamp Holder 燈腳		E27	E40	E27	E40
SIZE 呎吋	A	150mm	150mm	168mm	168mm
	B	217mm	235mm	242mm	260mm



20W → 42W
40W → 60W



50W → 80W
75W → 125W



* Indent Order 需預訂



- Aluminum and plastic material enhance the heat dissipation
半鋁塑物料，提昇散熱能力
- With microwave sensor type for selection
備有微波感應款式可供選擇
- Mercury free 不含水銀
- Less heat emission 熱能釋出量低

LED
Lite

LED T8 Tube LED T8 光管





Double Ended Input Tube 雙端輸入光管



MODEL 型號	FT 呎	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
-------------	---------	----------	--------------------	--------------	-------------------	------------	---------------

NEW LED T8 Aluminum and Plastic Tube 鋁塑光管

LT8A2C-10W-DL	2	6500K	180°	900lm	G13	>80	25pcs/ctn.
LT8A2C-10W-WWV		2700K		800lm			
LT8A2C-20W-DL	4	6500K	180°	1800lm	G13	>80	25pcs/ctn.
LT8A2C-20W-WWV		2700K		1700lm			
LT8A2C-24W-DL	5	6500K	180°	2160lm	G13	>80	25pcs/ctn.
LT8A2C-24W-WWV		2700K		2040lm			

Feature 特性

- Metal and plastic lamp body. 金屬及塑料燈體。
- Without fragile material. 無易碎物質。
- Durable and resistant to collision. 不易損壞，堅固耐用，可抵抗一定的碰撞衝擊。
- New generation of solid-state lighting, no ultraviolet, infrared and radiation.
採用新一代固體光源，不含紫外、紅外和輻射。
- Environmental friendly, non-toxic materials, no harmful gases and mercury, 100% recyclable.
環保無害，由無毒的材料製作，不含有害氣體，無汞，100% 可回收利用。
- With EMC certified models for selection.
備有通過 EMC 測試的型號可供選擇。

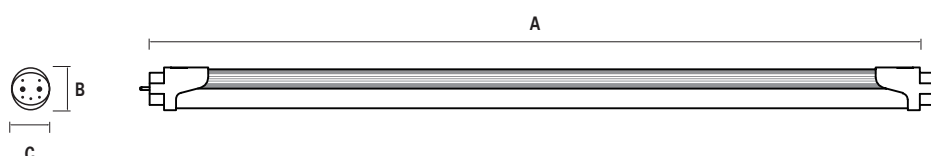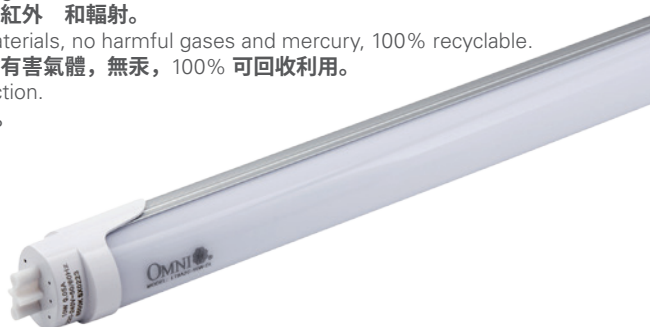

LENGTH 長度		2 FT 呎	4 FT 呎	5 FT 呎
SIZE 呎吋	A	588mm	1198mm	1498mm
	B	32mm	32mm	32mm
	C	28mm	28mm	28mm

LED T8 Aluminum and Plastic Tube
LED T8 鋁塑光管

VS
Fluorescent Tube 光管

10W → 17W
20W → 35W
24W → 42W

IEC 62471 IEC 62776 IEC 62778

CE 30,000 Hours >0.5 Power Factor

180° SUPER WIDE ANGLE 220V-240V~ 50/60Hz 50% ENERGY SAVINGS

10 YEARS OF LIFE NO UV/IR

SAFE EASY TO USE RoHS Compliant

T8 Tube
T8 光管

Double Ended Input Tube 雙端輸入光管



MODEL 型號	FT 呎	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
-------------	---------	----------	--------------------	--------------	-------------------	------------	---------------

NEW LED T8 Micro Sensor Aluminum and Plastic Tube 微波感應鋁塑光管

LT8MS-2C-10W-DL	2	6500K	180°	830lm	G13	>80	25pcs/ctn.
LT8MS-2C-10W-WW		2700K		790lm			
LT8MS-2C-20W-DL	4	6500K	180°	1700lm	G13	>80	25pcs/ctn.
LT8MS-2C-20W-WW		2700K		1600lm			
LT8MS-2C-24W-DL	5	6500K	180°	2040lm	G13	>80	25pcs/ctn.
LT8MS-2C-24W-WW		2700K		1950lm			

Feature 特性


- The operating principle of micro sensor is to detect the movement of human body or object. When a human body or object is moving within the sensing range, the tube will light up automatically.
微波感應以探測人體或物體移動為目標，只要在微波感應範圍內有人體或物體移動，光管會自動亮起。
- The microwave signal from micro sensor tube can penetrate non-metallic objects, such as curtains, thin walls and so on.
微波感應光管所發出的微波信號可穿透非金屬物，如窗簾，薄牆等。
- With anti-radio frequency interference ability, the sensitivity will not be affected by temperature, humidity, light, air, dust and so on.
具有抗射頻干擾能力，不會受溫度、濕度、光、氣流、塵埃等影響其感應力。
- The sensing range of microwave sensor can be up to 8 meters and automatically light off after leaving 30 seconds.
微波感應敏銳，感應範圍可遠達 8 米，離開後 30 秒自動關閉。

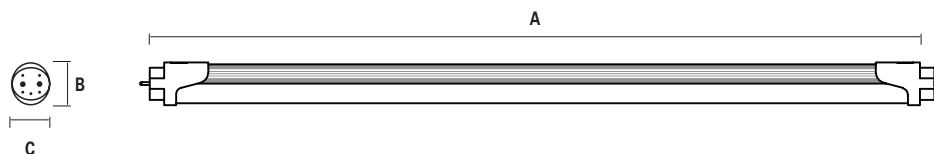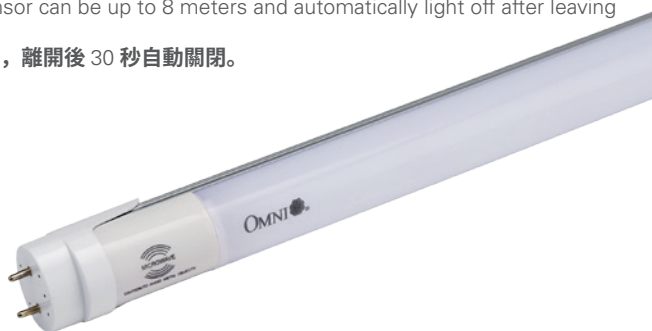

LENGTH 長度		2 FT 呎	4 FT 呎	5 FT 呎
SIZE 呎吋	A	588mm	1198mm	1498mm
	B	32mm	32mm	32mm
	C	28mm	28mm	28mm



VS



10W → 16W
20W → 34W
24W → 40W

IEC
62471

IEC
62776

IEC
62778

CE

30,000
Hours

>0.5
Power Factor

180°
SUPER
WIDE ANGLE

220V~240V~
50/60Hz

UP TO
50%
ENERGY
SAVINGS

10
YEARS OF LIFE

NO
UV/IR

RoHS
Compliant

SAFE
EASY TO USE

RoHS
Compliant

RoHS
Compliant



Double Ended Input Tube 雙端輸入光管


MODEL 型號	FT 呎	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED T8 Plastic Tube 全塑光管							
LT8-10W-DL	2	6500K	180°	1000lm	G13	>80	20pcs/ctn.
LT8-10W-CW		4000K		950lm			
LT8-10W-WWW		2700K		900lm			
LT8-20W-DL	4	6500K	180°	2000lm	G13	>80	20pcs/ctn.
LT8-20W-CW		4000K		1900lm			
LT8-20W-WWW		2700K		1800lm			

LED T8 Double Ended Input
Plastic Tube
LED T8 雙端輸入全塑光管

VS
Fluorescent Tube 光管

10W → 18W
20W → 36W

T8 Tube
T8 光管

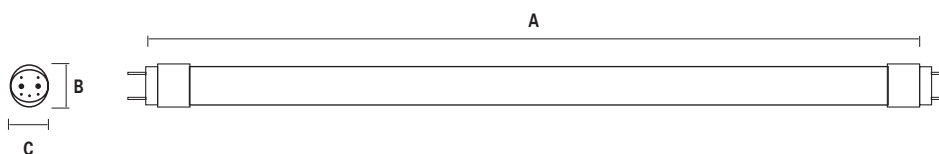

LENGTH 長度		2 FT 呎	4 FT 呎
SIZE 呎吋	A	600mm	1200mm
	B	32mm	32mm
	C	28mm	28mm

IEC 62471

IEC 62776

CE

20,000 Hours

>0.9 Power Factor

180° SUPER WIDE ANGLE

220V-240V~ 50/60Hz

UP TO 60% ENERGY SAVINGS

10 YEARS OF LIFE

NO UV/IR

SAFE EASY TO USE

RoHS Compliant


Single Ended Input Tube 單端輸入光管

MODEL 型號	FT 呎	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED T8 Plastic Tube 全塑光管							
LT8S-10W-DL	2	6500K	180°	1000lm	G13	>80	20pcs/ctn.
LT8S-10W-CW		4000K		950lm			
LT8S-10W-WWW		2700K		900lm			
LT8S-20W-DL	4	6500K	180°	2000lm	G13	>80	20pcs/ctn.
LT8S-20W-CW		4000K		1900lm			
LT8S-20W-WWW		2700K		1800lm			

LED T8 Single Ended Input
Plastic Tube
LED T8 單端輸入全塑光管

VS
Fluorescent Tube 光管

10W → 18W
20W → 36W

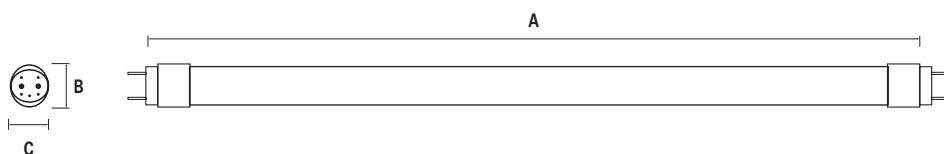

LENGTH 長度		2 FT 呎	4 FT 呎
SIZE 呎吋	A	600mm	1200mm
	B	32mm	32mm
	C	28mm	28mm

IEC 62471

CE

20,000 Hours

>0.9
Power Factor

180°
SUPER WIDE ANGLE

220V-240V~
50/60Hz

UP TO
60%
ENERGY SAVINGS

10
YEARS OF LIFE

NO UV/IR

RoHS
SAFE
EASY TO USE

RoHS
compliant

WEEE



Single Ended Input Tube 單端輸入光管


MODEL 型號	FT 呎	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED T8 Glass Tube 玻璃光管							
LT8G-7W-DL	2	6500K	270°	700lm	G13	>80	25pcs/ctn.
LT8G-7W-CW		4000K		550lm			
LT8G-15W-DL	4	6500K	270°	1500lm	G13	>80	25pcs/ctn.
LT8G-15W-CW		4000K		1350lm			
LT8G-24W-DL	5	6500K	270°	2200lm	G13	>80	25pcs/ctn.
LT8G-24W-CW		4000K		1800lm			



LED T8 Glass Tube
LED T8 玻璃光管


VS

Fluorescent Tube 光管



7W → 14W
15W → 28W
24W → 42W

T8 Tube
T8 光管

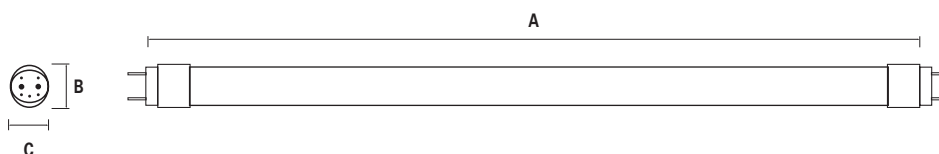

LENGTH 長度		2 FT 呎	4 FT 呎	5 FT 呎
SIZE 呎吋	A	600mm	1200mm	1512mm
	B	32mm	32mm	32mm
	C	28mm	28mm	28mm



Recommended Accessory 推介配件:

Fuse 保險絲
LT8-FUSE



SRP 建議零售價 (HK\$) \$ 4.90



- Up to 85% energy savings when compare to incandescent par lamp
比烏絲射燈節能高達 85%
- Weatherproof IP65 rating 達 IP65 防水級別
- Lightweight design 輕量設計
- Stays cool even after long period of use 長時間使用仍能保持低
- Higher light intensity up to 15 meters 長達 15 米光照強度
- Mercury free 不含水銀


LED
Lite

LED Par Lamp LED 射燈






MODEL 型號	CT 色溫	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED Par 20 Lamp 射燈 20 - 6W						
LPR20E27-6W/D	6500K	30°	400lm	E27	>80	48pcs/ctn.
LPR20E27-6W/W	2700K		380lm			
LED Par 30 Lamp 射燈 30 - 10W IP65						
LPR30E27-10W/D	6500K	30°	750lm	E27	>80	24pcs/ctn.
LPR30E27-10W/W	2700K		700lm			
LED Par 38 Lamp 射燈 38 - 15W IP65						
LPR38E27-15W/D	6500K	30°	1100lm	E27	>80	12pcs/ctn.
LPR38E27-15W/W	2700K		1000lm			

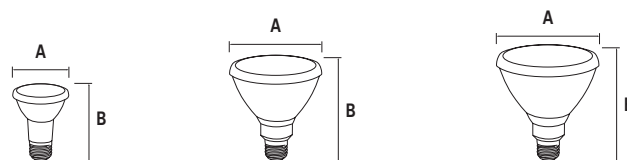

Product 產品		Par 射燈 20-6W	Par 射燈 30-10W	Par 射燈 38-15W
SIZE 呎吋	A	63mm	97mm	120mm
	B	91mm	100mm	135mm



6W → 50W
10W → 80W
15W → 120W



Par Lamp
射燈

Recommended Fixture 推介燈具:

Weatherproof Lamp Holder 防水燈座



Model No 型號 : E27-DWH-PK
Apply To 適用於 : Par 30 / Par 38

Garden Lamp Holder 防水田園燈座



Model No 型號 : E27-GWH-PK
Apply To 適用於 : Par 30 / Par 38



- High Colour rendering index and moderate luminosity 顯色度高，光度適中
- Applicable to most of the Buddhist Kiosks, electrical lotus light and candle holder 適用於大部份神樓、電子蓮花燈及燭檯
- Lower power consumption and less heat emission, suitable for prolonged use 低能源使用及熱能釋出，適合長時間使用


LED
Lite

LED Red Bulb LED 紅燈膽






MODEL 型號	CT 色溫	WATT 瓦數	LAMP HOLDER 燈腳	PACKING 包裝
LED Red Round Bulb 紅球膽				
LRR-1.5W	Red	1.5W	E27 / B22	60pcs/ctn.
NEW LED Red Candle Bulb 紅蠟燭膽				
LMR-0.5WE12	Red	0.5W	E12	24 pairs/ctn.
LMR-2WE14		2W	E14	

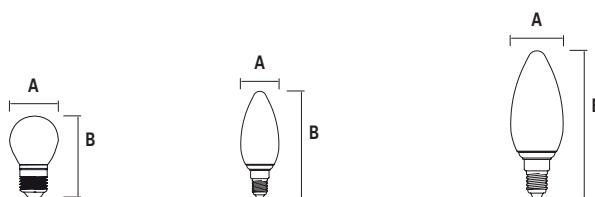

Product 產品		Round Bulb 球膽	Candle bulb 蠟燭膽 -0.5W	Candle Bulb 蠟燭膽 -2W
SIZE 呎吋	A	40mm	20mm	35mm
	B	70mm	69mm	100mm



0.5W → 5W
1.5W → 10W
2W → 15W



Red Bulb
紅燈膽



- 3 colours or brightness in 1 bulb
一個燈膽擁有 3 種色 或光度
- Switch on and off for colour or brightness changing
開關燈制便能轉換色 或調教光度
- The bulb is applicable to traditional switch, no dimmer is required
可配合傳統開關燈制，不用配備調光器

LED
Lite

LED Infinite Lamp LED Infinite 燈





MODEL 型號	CT 色溫	WATT 瓦數	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
-------------	----------	------------	--------------------	--------------	-------------------	------------	---------------

NEW LED TRIO A Bulb 三色 A 形球膽


LLA55E27-7W-TRIO	2700K	7W	270°	580ml	E27	>80	48pcs/ctn.
	6500K			700ml			
	4000K			650ml			
LLA60E27-9W-TRIO	2700K	9W	270°	700ml	E27	>80	48pcs/ctn.
	6500K			800ml			
	4000K			750ml			

NEW LED TRIO Flat Lamp 三色簡約頂燈

LFE27-22W-TRIO	2700K	22W	120°	1700ml	E27	>80	10pcs/ctn.
	6500K			1900ml			
	4000K			1800ml			
LFE27-30W-TRIO	2700K	30W	120°	2400ml	E27	>80	6pcs/ctn.
	6500K			2700ml			
	4000K			2600ml			

NEW LED TRIDIM A Bulb 三段調光球膽

LLA60E27-9WW-TD	2700K	9W	270°	700ml	E27	>80	48pcs/ctn.
				450ml			
				150ml			

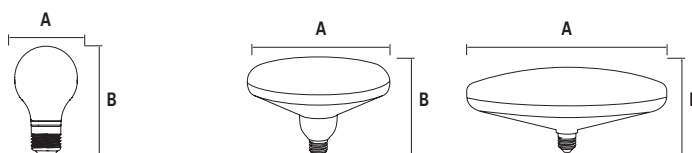

Product 產品		TRIO 7W	TRIO/TRIDIM 9W	TRIO FLAT LAMP 22W	TRIO FLAT LAMP 30W
SIZE 呎吋	A	55mm	60mm	201mm	310mm
	B	104mm	110mm	140mm	130mm

LED TRIO A Bulb 三色 A 形球膽



Video Demo 示範短片



LED TRIO Flat Lamp 三色簡約頂燈



Video Demo 示範短片



LED TRIDIM A Bulb 三段調光球膽



Video Demo 示範短片



IEC
62471

IEC
62560

CE

20,000
Hours

220V-240V~
50/60Hz

UP TO
85%
ENERGY
SAVINGS

10
YEARS OF LIFE

NO
UV/IR

RoHS
Compliant

SAFE
EASY TO USE

RoHS
Compliant

RoHS
Compliant



- Capable to dimming from 100% to 10% 能夠調節由 100% 至 10% 光度
- Compatible with trailing edge dimmer 兼容後沿調光器
- Up to 90% energy savings when compare with incandescent
比烏絲燈膽節能高達 90%

LED
Lite

LED Dimmable Bulb*


LED 調光燈膽*




*Applicable to traditional dimmer. 能應用於傳統調光器
Please consult with professional technician 建議先向專業技術人員諮詢



MODEL 型號	CT 色溫	WATT 瓦數	BEAM ANGLE 發光角度	LUMENS 流明	LAMP HOLDER 燈腳	CRI 顯色度	PACKING 包裝
LED Dimmable A Bulb 調光 A 形燈膽							
LLA60E27D-9W-DL	6500K	9W	270°	850lm	E27	>80	48pcs/ctn.
LLA60E27D-9W-WW	2700K			800lm			
LLA65E27D-12W-DL	6500K	12W	270°	1000lm	E27	>80	48pcs/ctn.
LLA65E27D-12W-WW	2700K			900lm			
LED MR16 Dimmable Spotlight 調光射燈							
LFMR16GU5.3/ GU10D-8W-DL	4000K	8W	60°	630lm	GU5.3 / GU10	>80	48pcs/ctn.
LFMR16GU5.3/ GU10D-8W-WW	2700K			600lm			
LFMR16GU10D- 12W-DL	4000K	12W	60°	980lm	GU10	>80	48pcs/ctn.
LFMR16GU10D- 12W-WW	2700K			950lm			
LED Clear Cover Dimmable Candle Bulb 清面調光蠟燭燈							
LCC35E14D-6W-DL	6500K	6W	270°	380lm	E14	>80	48pcs/ctn.
LCC35E14D-6W-WW	2700K			350lm			



Dimmable A Bulb 調光 A 形燈膽		9W	12W
SIZE 呎吋	A	60mm	65mm
	B	110mm	125mm



MR16 Dimmable Spotlight 調光射燈		8W	12W
SIZE 呎吋	A	50mm	50mm
	B	56mm	80mm



Clear Cover Dimmable Candle Bulb 清面調光蠟燭燈		6W
SIZE 呎吋	A	35mm
	B	105mm

LED Dimmable A Bulb
LED 調光 A 形燈膽

VS

Incandescent Bulb
烏絲膽

9W → 60W
12W → 80W

LED Clear Cover Dimmable Candle Bulb
LED 清面調光蠟燭燈

VS

Incandescent Candle Bulb
烏絲膽

6W → 40W

LED MR16 Dimmable Spotlight
LED MR16 調光射燈

VS

Halogen bulbs
石英膽

8W → 50W
12W → 70W

IEC 62471 IEC 62560 CE

20,000 Hours 220V~240V~ 50/60Hz UP TO 90% ENERGY SAVINGS

10 YEARS OF LIFE NO UV/IR Dimmable

SAFE EASY TO USE RoHS Compliant



只適用於





- Aluminum heatsink enhance heat dissipation
採用鋁料散熱器，提昇散熱能力
- Maintenance free fixture. Lamp and driver in one assembly
燈與驅動器一體化，免卻保養燈具
- Warranty period up to 5 year
保養期最高可長達 5 年



LED Integrated Recessed Downlight

LED 一體化嵌入式筒燈



MODEL 型號	CT 色溫	INCH 吋	WATT 瓦數	BEAM ANGLE 發光角度	LUMENS 流明	CUT OUT SIZE 開孔尺寸	CRI 顯色度	PACKING 包裝
-------------	----------	-----------	------------	--------------------	--------------	----------------------	------------	---------------

NEW LED Deluxe Recessed Downlight 豪華嵌入式筒燈 *

3 Year
Warrant

LCDM-4-12W	2700K / 4000K / 5000K / 5700K	4"	12W	40°/60°	1200lm	100mm	>80	1pcs/ctn.
LCDM-6-30W	2700K / 4000K / 5000K / 5700K	6"	30W	40°/60°	3000lm	150mm		
LCDM-8-40W	2700K / 4000K / 5000K / 5700K	8"	40W	40°/60°	4000lm	200mm		


NEW LED Supreme Recessed Downlight 至尊嵌入式筒燈 *

5 Year
Warrant


LHID-6-60W	3000K / 4000K / 5000K / 5800K	6"	60W	60°	5800lm	100mm	>80	1pcs/ctn.
LHID-8-60W	3000K / 4000K / 5000K / 5800K	8"	60W	60°	5800lm	200mm		
LHID-10-100W	3000K / 4000K / 5000K / 5800K	10"	100W	60°	9500lm	250mm		
LHID-12-100W	3000K / 4000K / 5000K / 5800K	12"	100W	60°	9500lm	300mm		




LED Deluxe Recessed Downlight
豪華嵌入式筒燈

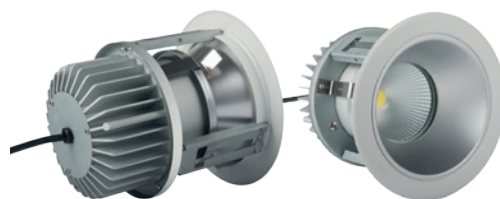

LED Supreme Recessed Downlight
至尊嵌入式筒燈

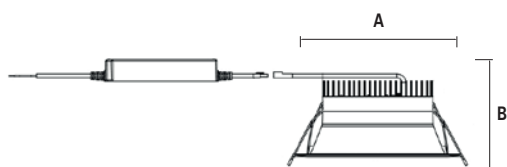

Deluxe Recessed Downlight 豪華嵌入式筒燈		12W	30W	40W
SIZE 呎吋	A	140mm	190mm	240mm
	B	95mm	110mm	110mm




Supreme Recessed Downlight 至尊嵌入式筒燈		6" 60W	8" 60W	10" 100W	12" 100W
SIZE 呎吋	A	169mm	220mm	270mm	340mm
	B	163mm	165mm	197mm	197mm



* Indent Order 需預訂

Integrated Recessed Downlight
一體化嵌入式筒燈

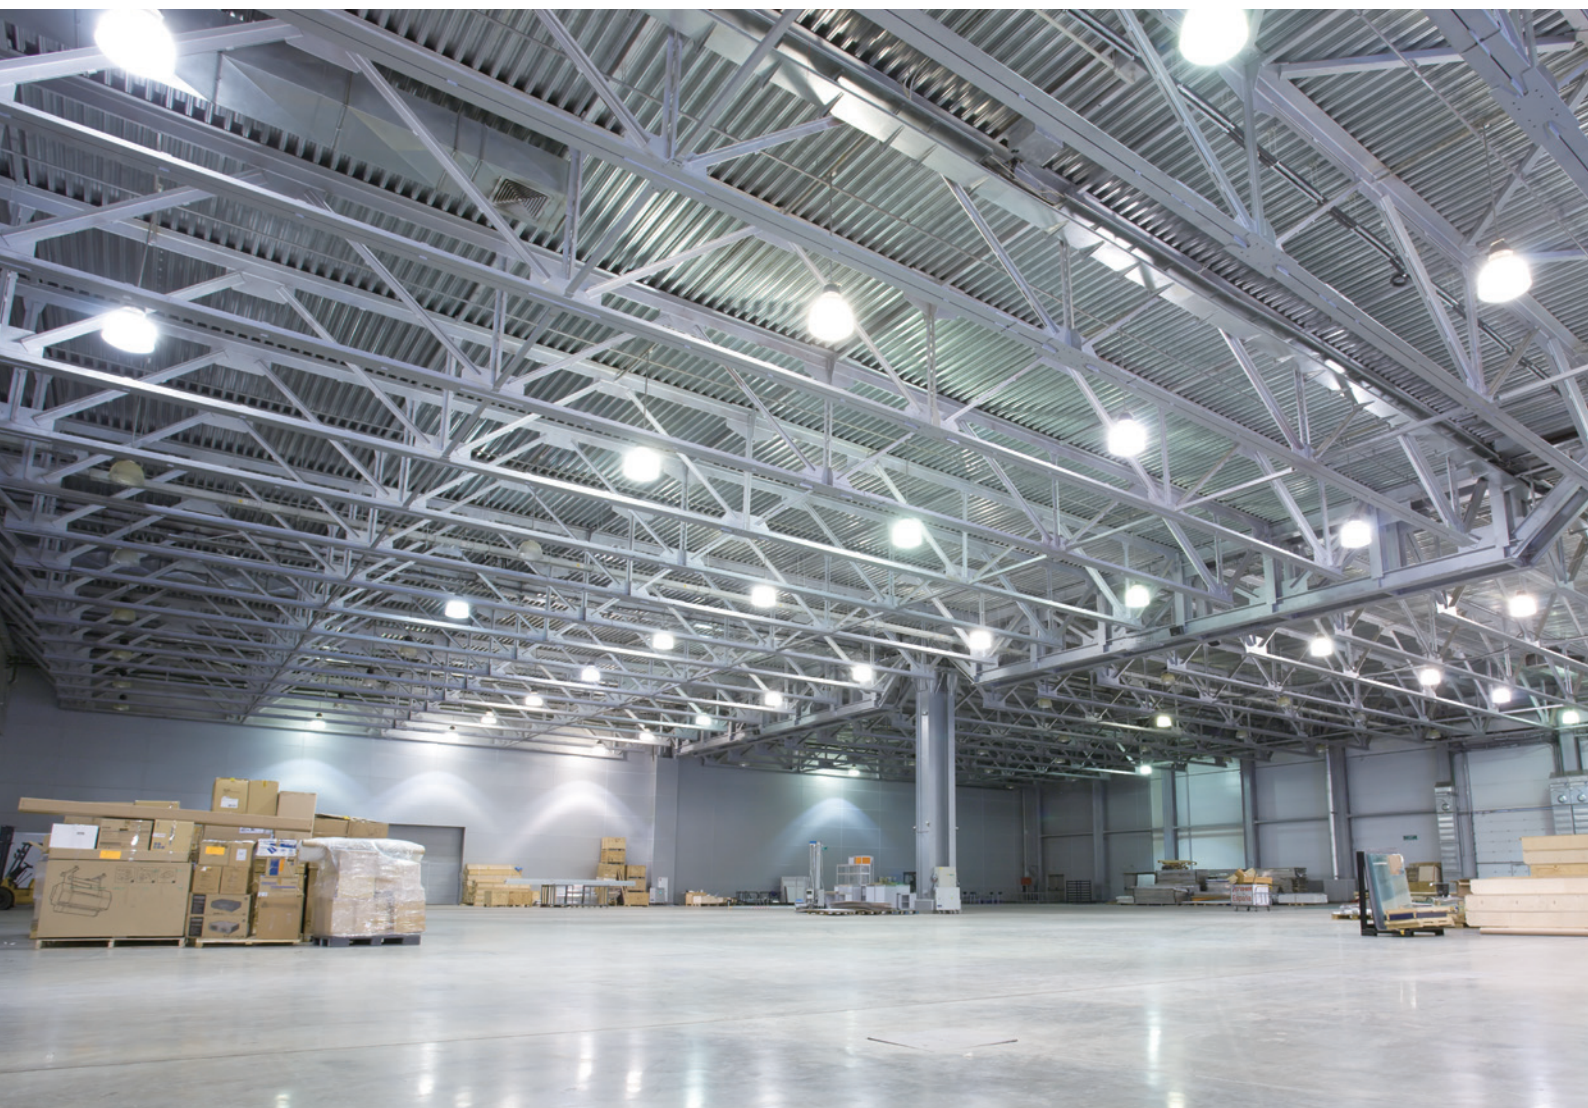

- Integrated high bay lamp for easy installation and maintenance
一體化設計高樓底照明，方便安裝及保養
- A variety of accessories are available, which best fit for different environment
備有多種配件可供選購，適合不同環境需要
- Warranty period up to 5 year
保養期最高可長達 5 年




LED High Bay Lamp

LED 高樓底燈





MODEL 型號	CT 色溫	WATT 瓦數	BEAM ANGLE 發光角度	LUMENS 流明	CRI 顯色度	PACKING 包裝
NEW LED Integrated High Bay Lamp 一體化高樓底燈 * 2 Year Warrant 30,000 Hours						
LHB-100DL-100 / 60	6500K	100W	100° / 60°	10000lm	>80	1pcs/ctn.
LHB-100WW-100 / 60	2700K			9000lm		
LHB-150DL-100 / 60	6500K	150W	100° / 60°	15000lm	>80	1pcs/ctn.
LHB-150WW-100 / 60	2700K			14000lm		
NEW LED Multiplicity High Bay Lamp 多樣式高樓底燈 * 5 Year Warrant 40,000 Hours IP65						
LSHL-100W-DL	5000K	100W	60°/70°/90°/120°#	13000lm	>80	1pcs/ctn.
LSHL-100W-CW	4000K			12000lm		
LSHL-150W-DL	5000K	150W	60°/70°/90°/120°#	19500lm	>80	1pcs/ctn.
LSHL-150W-CW	4000K			18000lm		
LSHL-200W-DL	5000K	200W	60°/70°/90°/120°#	26000lm	>80	1pcs/ctn.
LSHL-200W-WW	4000K			24000lm		

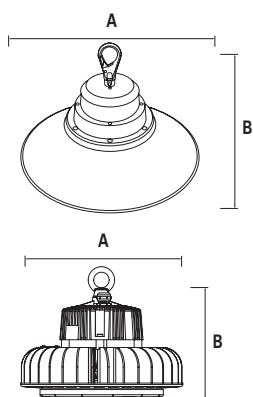

Integrated High Bay Lamp 一體化高樓底燈		60° 100W / 150W	100° 100W / 150W
SIZE 呎吋	A	410mm	465mm
	B	355mm	335mm

Multiplicity High Bay Lamp 多樣式高樓底燈		100W	150W	200W
SIZE 呎吋	A	252mm	252mm	280mm
	B	180mm	180mm	228mm

Recommended Fixture 推介燈具:

Multiplicity High Bay Plastic Diffuser* 多樣式高樓底燈膠散光罩*



Model No 型號 : LSHL-PC
Size 呎吋 : 276mm(H) X 413mm(W)
Beam Angle 發光角度 : 70°

Multiplicity High Bay Aluminum Diffuser* 多樣式高樓底燈鋁散光罩*



Model No 型號 : LSHL-AL-60 / LSHL-AL-90 / LSHL-AL-120
Size 呎吋 : 60°-130mm(H) x 343mm(W) /
90°-130mm(H) x 353mm(W) /
120°-119mm(H) x 500mm(W)
Beam Angle 發光角度 : 60°/90°/120°

Multiplicity High Bay Sensor* 多樣式高樓底燈感應器*



Model No 型號: LSHL-S

Multiplicity High Bay Mounted Holder* 多樣式高樓底燈天花支架*




Model No 型號: LSHL-C


Multiplicity High Bay Adjustable Angle Holder* 多樣式高樓底燈調角度支架*



Model No 型號: LSHL-A




100W → 170W
150W → 280W



100W → 230W
150W → 380W
200W → 500W



* Indent Order 需預訂
Apply together with diffuser
需配合散光罩

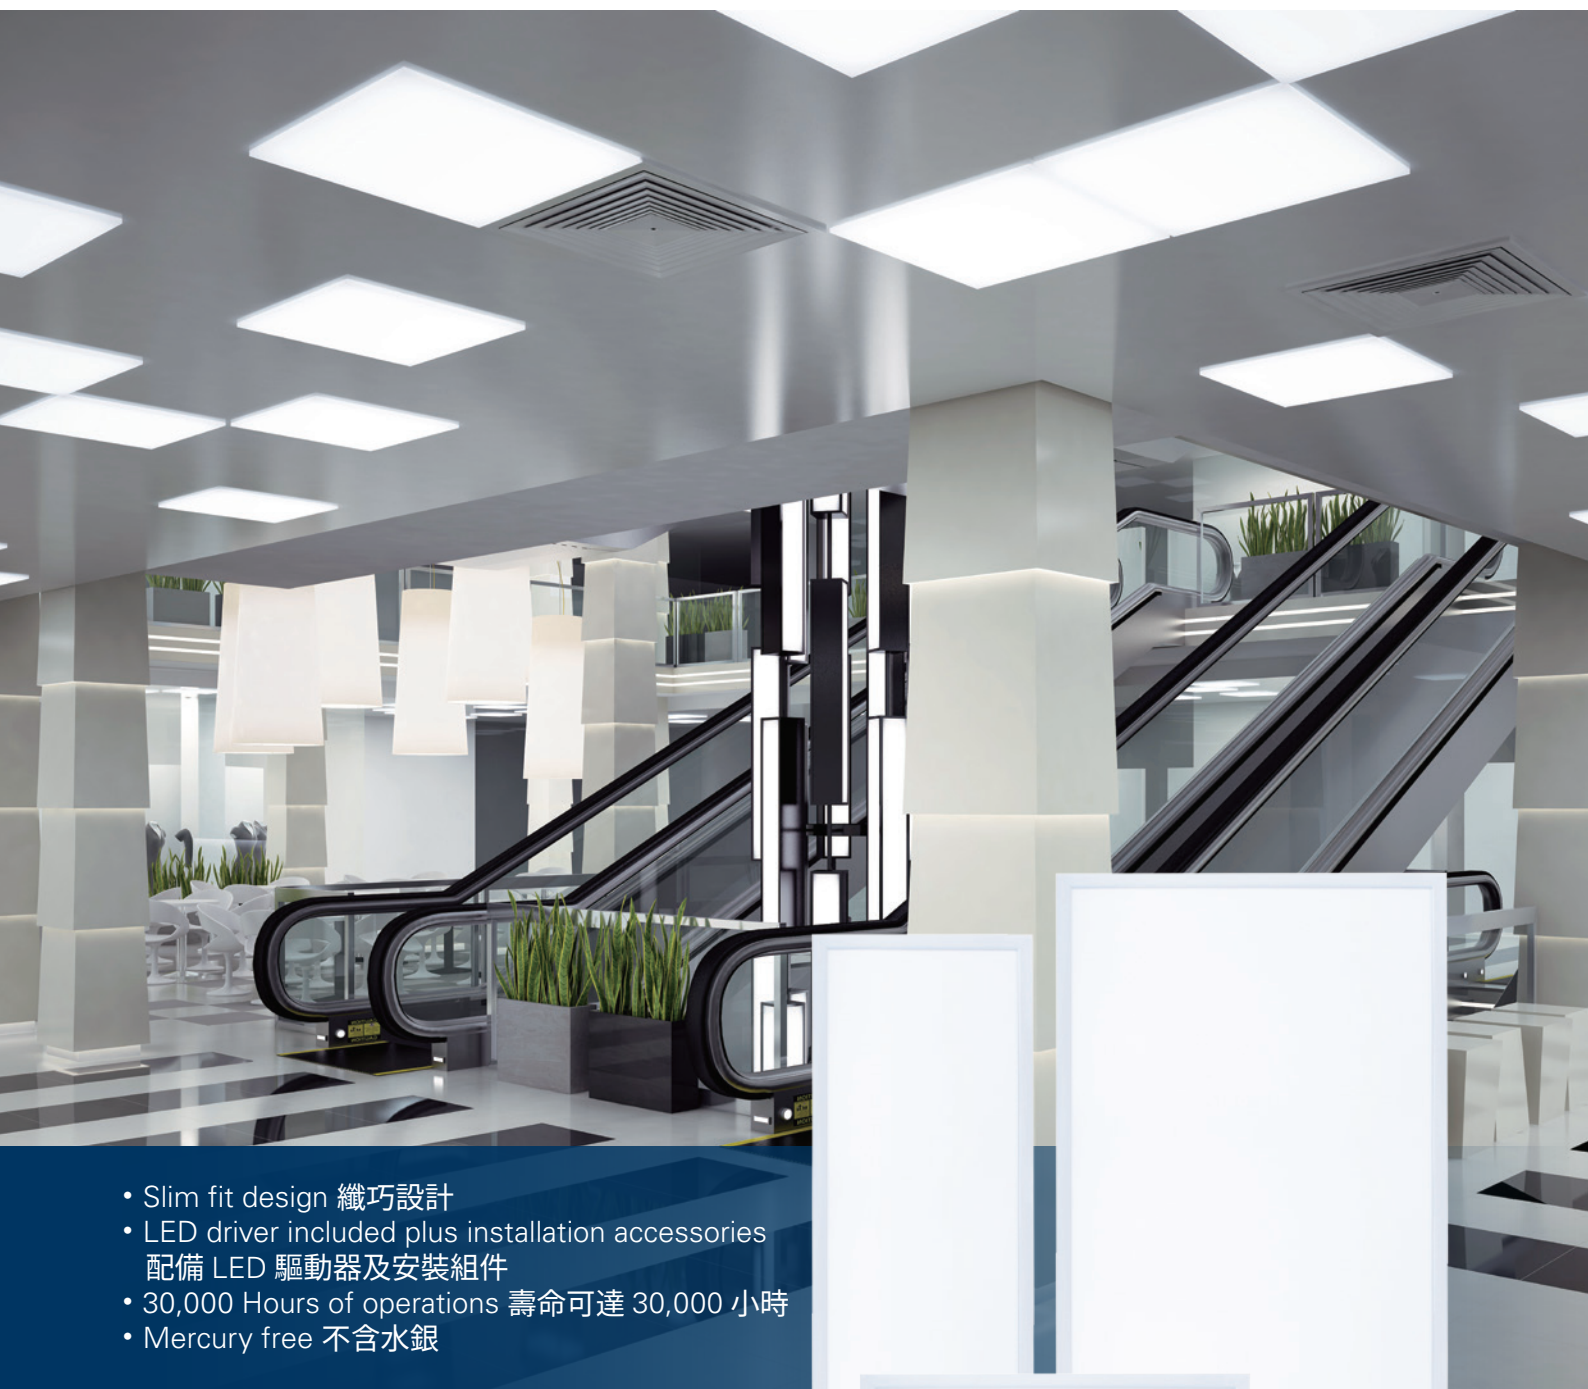


- Slim fit design 纖巧設計
- LED driver included plus installation accessories
配備 LED 驅動器及安裝組件
- 30,000 Hours of operations 壽命可達 30,000 小時
- Mercury free 不含水銀




LED Panel Light LED 平板燈



MODEL 型號	CT 色溫	WATT 瓦數	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Square Panel Light 正方形平板燈					
LP330-18W-DL/CW/WW	6500K / 4000K* / 2700K*	18W	1440lm	>80	5pcs/ctn.
LP660-40W-DL/CW/WW		40W	3200lm		6pcs/ctn.
LED Retangular Panel Light 長方形平板燈					
LP312-40W-DL/CW/WW	6500K / 4000K* / 2700K*	40W	3200lm	>80	4pcs/ctn.
NEW LP612-50W-DL/CW/WW	6500K* / 4000K* / 2700K*	50W	4000lm		4pcs/ctn.



Square Panel Light 正方形平板燈		18W	40W
SIZE 呎吋	A	295mm	595mm
	B	295mm	595mm
	C	10.5mm	10.5mm



Rectangular Panel Light 長方形平板燈		40W	50W
SIZE 呎吋	A	1195mm	1195mm
	B	295mm	595mm
	C	10.5mm	10.5mm



Panel Light
平板燈

* Indent Order 需預訂

Recommended Fixture 推介燈具:

Surface Mounted Frame* 吸頂框*



Model No 型號: SMF-330 / SMF-660 / SMF-312 / SMF-612

Suspended Mounting Kit 懸掛安裝套裝



Model No 型號: SMK-1845



- Neat design and smooth finish 利落設計及光滑外觀
- Soft acrylic type diffuser 柔和的亞加力光散板
- Slim and lightweight to only 75mm width and 24mm thick 纖薄輕巧，僅闊 75mm，厚 24mm
- Less heat emission 熱能釋出量低

LED
Lite

LED Slim Panel Light LED 纖巧平板燈





MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Slim Panel Light 纖巧平板燈 - 9W*				
LSP-9WDL	6500K	810lm	>80	10pcs/ctn.
LSP-9WCW	4000K	780lm		
LED Slim Panel Light 纖巧平板燈 - 18W*				
LSP-18WDL	6500K	1630lm	>80	10pcs/ctn.
LSP-18WCW	4000K	1600lm		
LED Slim Panel Light 纖巧平板燈 - 36W*				
LSP-36WDL	6500K	3280lm	>80	10pcs/ctn.
LSP-36WCW	4000K	3250lm		

		WATT 瓦數	9W	18W	36W
	SIZE 呎吋	A	300mm	600mm	1200mm
		B	75mm	75mm	75mm
		C	23.5mm	23.5mm	23.5mm



Slim Panel Light
纖巧平板燈

* Indent Order 需預訂



AC 220V:

- Anti-UV for outdoor use 能抵禦室外紫外線
- Enclosed material gives it an IP65 waterproof rating from water and dust 外層物料達 IP65 防水級別，並防塵
- With softer and even light emitted 發出的光 更柔和及平均

DC 12V:

- Mercury, UV and IR free 不含水銀，紫外線及紅外線
- Enclosed material gives it an IP44 waterproof rating which is good enough for indoor use 外層物料達 IP44 防水級別，適合室內使用

LED
Lite

LED Strip Light LED 燈帶





AC 220V

MODEL 型號	CT 色溫	WATT 瓦數	LUMENS 流明	LED TYPE 類別	BOARD WIDTH 燈帶闊度	LED QUANTITY 燈珠數量	CRI 顯色度	PACKING 包裝
-------------	----------	------------	--------------	----------------	---------------------	----------------------	------------	---------------

NEW LED Strip Light AC 220V 燈帶 AC 220V*

LSAC-4.5W-DL	6500K	4.5W	200lm/meter	SMD2835	6mm	60pcs/meter	>70	50 meters/roll
LSAC-4.5W-CW	4000K		180lm/meter					
LSAC-4.5W-WW	2700K		160lm/meter					
LSAC-8W-DL	6500K	8W	400lm/meter	SMD5050	8mm	60pcs/meter	>70	50 meters/roll
LSAC-8W-CW	4000K		380lm/meter					
LSAC-8W-WW	2700K		360lm/meter					
LSAC-9W-DL	6500K	9W	480lm/meter	SMD3528	8mm	120pcs/meter	>70	50 meters/roll
LSAC-9W-CW	4000K		460lm/meter					
LSAC-9W-WW	2700K		440lm/meter					

NEW LED Strip Light AC 220V -RGB 燈帶 AC 220V - RGB*

LSAC-8W-RGB	RGB	8W	-	SMD5050	8mm	60pcs/meter	>70	50 meters/roll
-------------	-----	----	---	---------	-----	-------------	-----	----------------

Strip Light
燈帶



LED Strip Light AC 220V - SMD2835




LED Strip Light AC 220V - SMD5050



* Indent Order 需預訂







LED Strip Light AC 220V - SMD3528

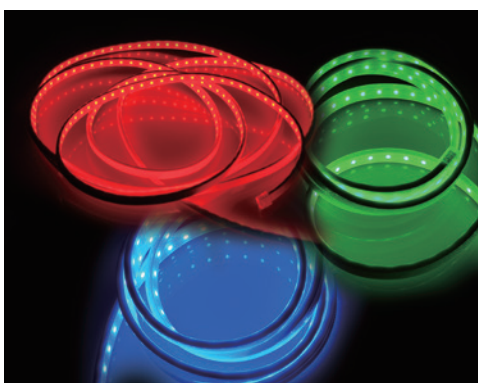

LED Strip Light AC 220V -RGB

AC 220V

Installation Guide 安裝說明:

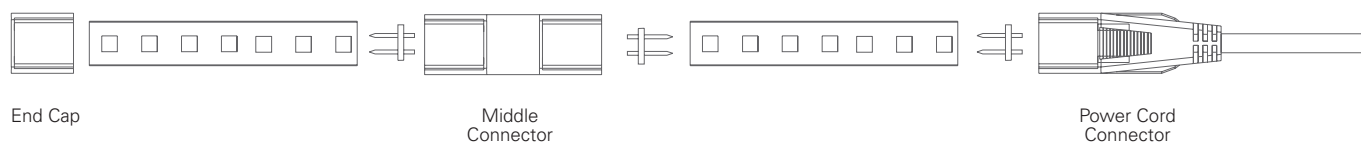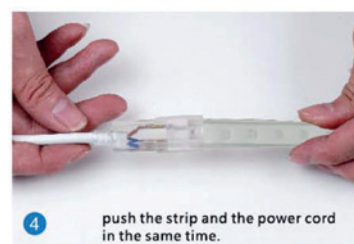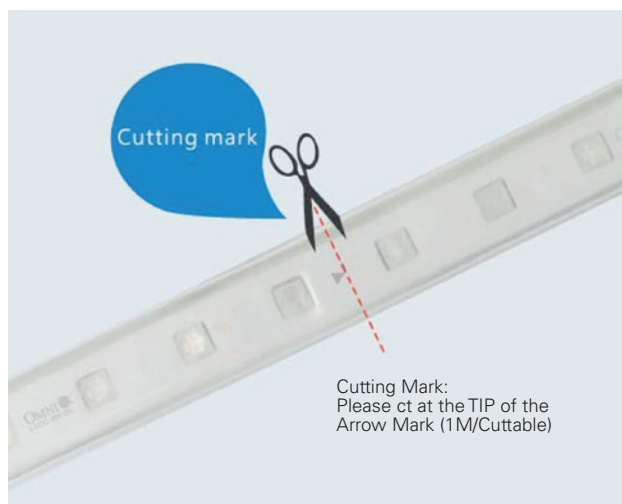

AC 220V Strip Light Accessories AC 220V 燈帶配件:

LED Strip Clamps 燈帶夾



Model No 型號: LSCA-AC-NE/C


LED Strip Connector Kit- AC 220V 燈帶連接器套裝 - AC 220V



X 2 pcs.



X 2 pcs.

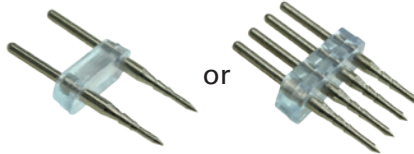

X 2 pcs.



X 4 pcs.



Model No 型號: LSCA-AC-NE/S



AC 220V Strip Light Accessories AC 220V燈帶配件:

MODEL 型號	WATT 瓦數	INTPUT VOLTAGE 輸入電壓	OUTPUT CURRENT 輸出電流
LED Strip Light Remote Controller AC220V 燈帶搖控器 AC220V*			
LSPC-AC-NE/RC	400W	AC 100~240V	5A

With high voltage RGB remote controller 配備高電壓RGB搖控器



LSPC-AC-NE/RC




* Indent Order 需預訂

Strip Light
燈帶

DC 12V

MODEL 型號	CT 色溫	WATT 瓦數	LUMENS 流明	LED TYPE 類別	BOARD WIDTH 燈帶闊度	LED QUANTITY 燈珠數量	CRI 顯色度	PACKING 包裝
NEW LED Strip Light DC 12V LED 燈帶 DC 12V								
LSDC-4.5W-DL	6500K	4.5W	200lm/meter	SMD2835	8mm	60pcs/meter	>70	5 meters/roll
LSDC-4.5W-CW	4000K		180lm/meter					
LSDC-4.5W-VWW	2700K		160lm/meter					

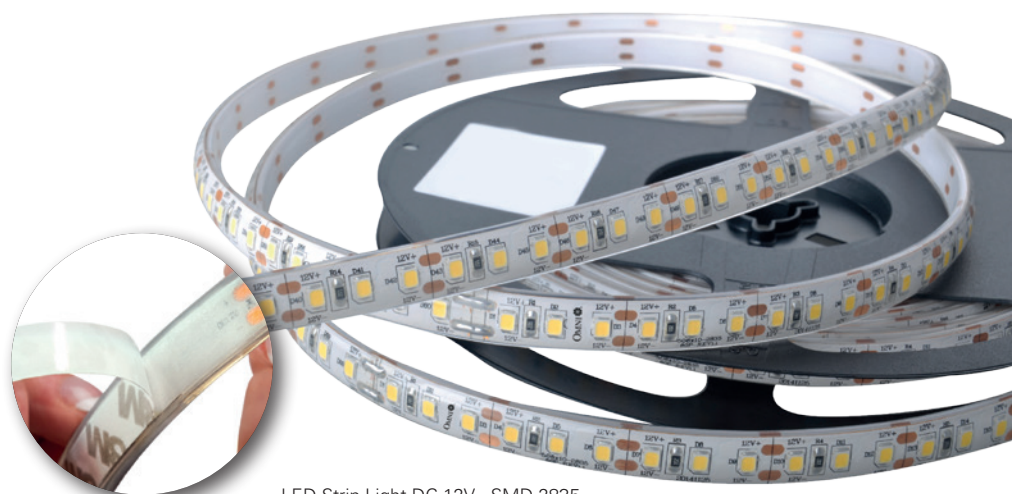



LED Strip Light DC 12V - SMD 2835



DC 12V

DC 12V Strip Light Accessories DC 12V 燈帶配件:

MODEL 型號	WATT 瓦數	WIDTH 闊度
Strip Light Connector Kit DC 12V 燈帶連接器套裝		
LSPC-DC-8MM	8W	8mm
LSPC-DC-10MM	12W	10mm

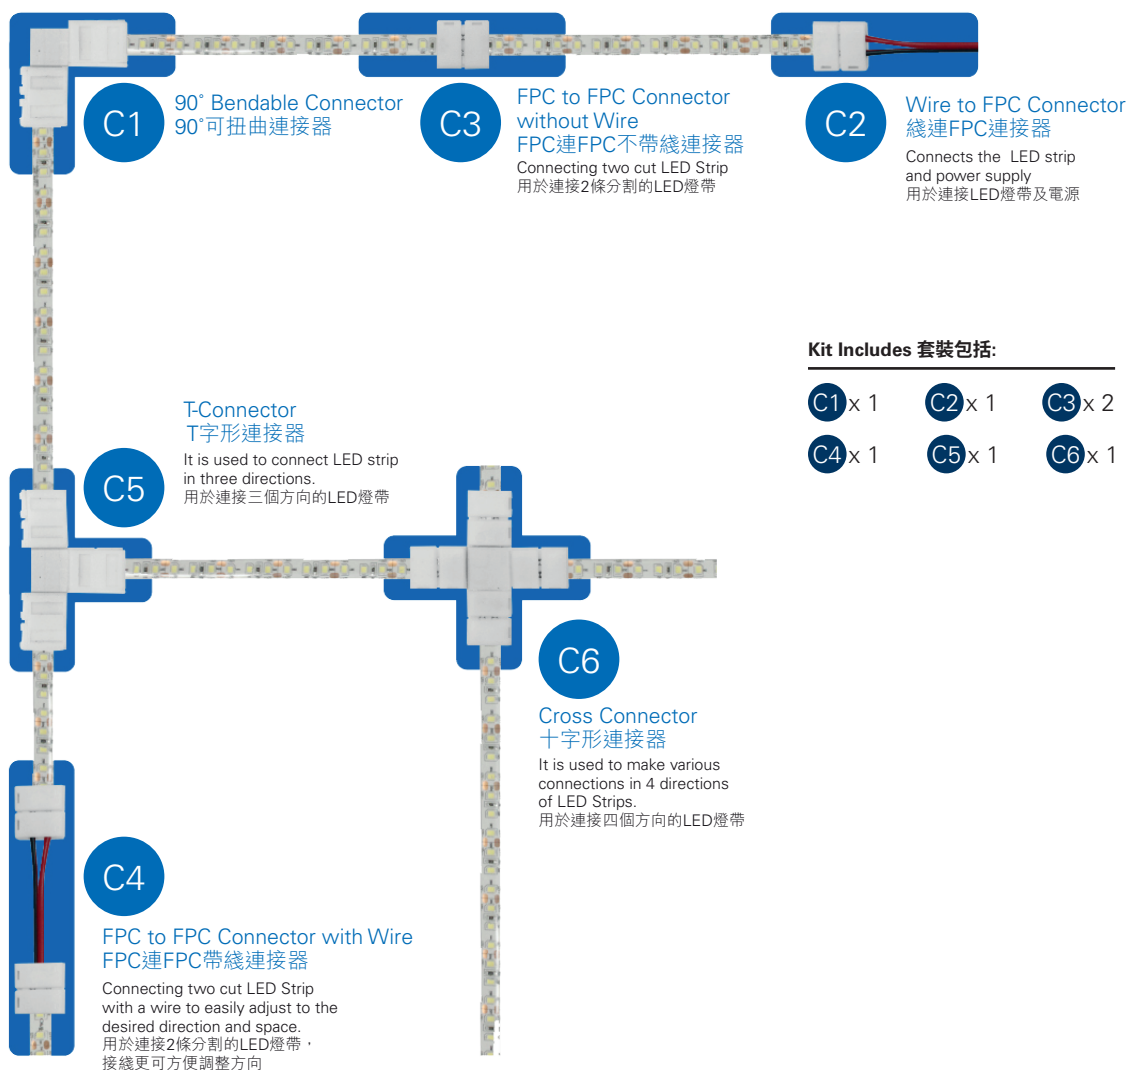

Kit Includes 套裝包括:

- | | | |
|---------------|---------------|---------------|
| C1 x 1 | C2 x 1 | C3 x 2 |
| C4 x 1 | C5 x 1 | C6 x 1 |



AC/DC 12V

AC/DC 12V Strip Light Accessories AC/DC 12V 燈帶配件:

MODEL 型號	WATT 瓦數	OUTPUT 輸出	EFFICIENCY 效能	WEIGHT 重量	PACKING 包裝
LED Driver AC/CD 12V LED 驅動器 AC/DC 12V					
LDD-060	60W	5A	82%	0.25Kg	10pcs/ctn.

Max. LED Strip Length LED 燈帶長度限制 : 8W x 5 meters

MODEL 型號	WATT 瓦數	OUTPUT 輸出	EFFICIENCY 效能	WEIGHT 重量	PACKING 包裝
LED Driver AC/CD 12V LED 驅動器 AC/DC 12V					
LDD-072	72W	6A	84%	0.31Kg	10pcs/ctn.

Max. LED Strip Length LED 燈帶長度限制 : 12W x 12 meters



LDD-060/LDD-072




Strip Light
燈帶

MODEL 型號	WATT 瓦數	OUTPUT 輸出	EFFICIENCY 效能	WEIGHT 重量	PACKING 包裝
LED Driver AC/CD 12V LED 驅動器 AC/DC 12V					
LDD-080	80W	6.67A	82%	0.55Kg	10pcs/ctn.

Max. LED Strip Length LED 燈帶長度限制 : 8W x (2 x 5 meters)

MODEL 型號	WATT 瓦數	OUTPUT 輸出	EFFICIENCY 效能	WEIGHT 重量	PACKING 包裝
LED Driver AC/CD 12V LED 驅動器 AC/DC 12V					
LDD-150	150W	12.50A	83%	0.85Kg	10pcs/ctn.

Max. LED Strip Length LED 燈帶長度限制 : 12W x (2 x 5 meters)



LDD-080/LDD-150



- Non corrosive plastic casing can resist external corrosion
外殼用上非腐蝕性塑料，能抵擋外來侵蝕
- Weatherproof IP65 rating 達 IP65 防水級別
- Can be ceiling or wall mounted 可安裝於天花或牆上
- Opaque diffuser for soft light effect without glare
不透明的擴散器使燈光更柔和
- Mercury free 不含水銀


LED
Lite

LED Weatherproof Light LED 防水燈






MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Weatherproof Light 防水燈 - 20W				
LWCL-20WDL	6500K	1800lm	>80	10pcs/ctn.
LWCL-20WW	2700K	1600lm		



WATT 瓦數		20W
SIZE 呎吋	A	221mm
	B	80mm



Weatherproof Light
防水燈

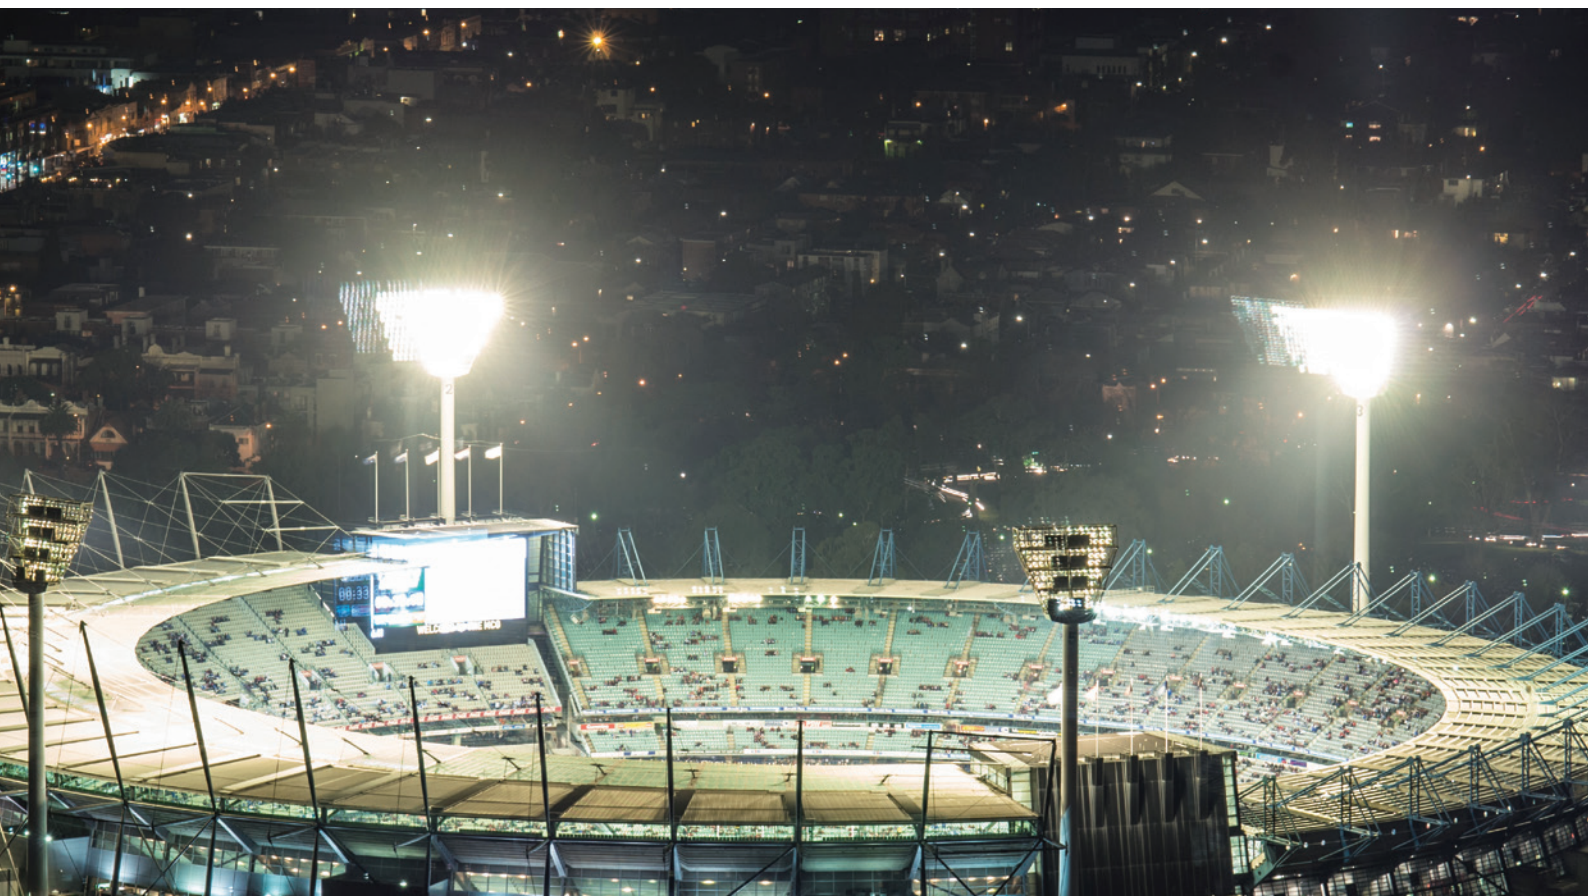

Round Flood Light 圓形泛光燈

- Frosted and impact resistant glass cover
磨砂抗撞擊玻璃面

- Aluminum casing 鋁金屬外殼

Square Flood Light 方形泛光燈

- Pure copper heat pipe and massive cooling fins
for effective heat dissipation

純銅片及巨形降片，有助散熱

- Non-corrosive aluminum reflector and casing
外殼用上防腐蝕鋁材及反射物料

- 13 Flexible Positions with adjustable angle
13 個活動位置方便調教角度




LED Weatherproof Flood Light LED 防水泛光燈



Weatherproof Round Flood Light 圓形防水泛光燈

MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Weatherproof Round Flood Light 圓形防水泛光燈 - 50W				
LWFL-50WDL	6500K	3500lm	>80	6pcs/ctn.
LWFL-50WW	2700K	3200lm		
LED Weatherproof Round Flood Light 圓形防水泛光燈 - 75W*				
LWFL-75WDL	6500K	5500lm	>80	6pcs/ctn.
LWFL-75WW	2700K	5000lm		




WATT 瓦數		50W	75W
SIZE 呎吋	A	203mm	203mm
	B	248mm	248mm
	C	167mm	167mm
	D	174mm	190mm



* Indent Order 需預訂

Weatherproof Flood Light
防水泛光燈

Weatherproof Square Flood Light 方形防水泛光燈

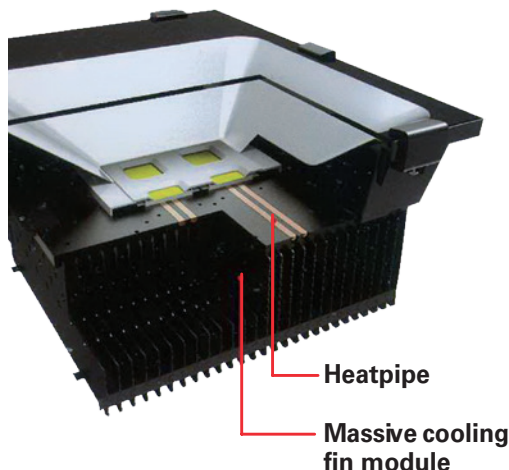


Heat pipe and massive cooling fins technology

By using 6mm heatpipe, the heat generated by the LED is quickly transferred to the cooling module of massive fins, efficiently reducing the temperature of the LED chips and extends the lifespan of the lighting source.



High performance Heatpipe Conducts the Heat



The heatpipe's principle is using the quick phases change of the liquid (medium) under vacuum condition which exchange the heat. The heat transfer rate is superior to any metal.



Patented HDT Technology

High efficient heatpipes contact the heat source directly to reach the cooling effect.

Structure 結構:

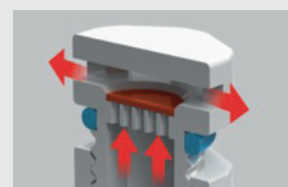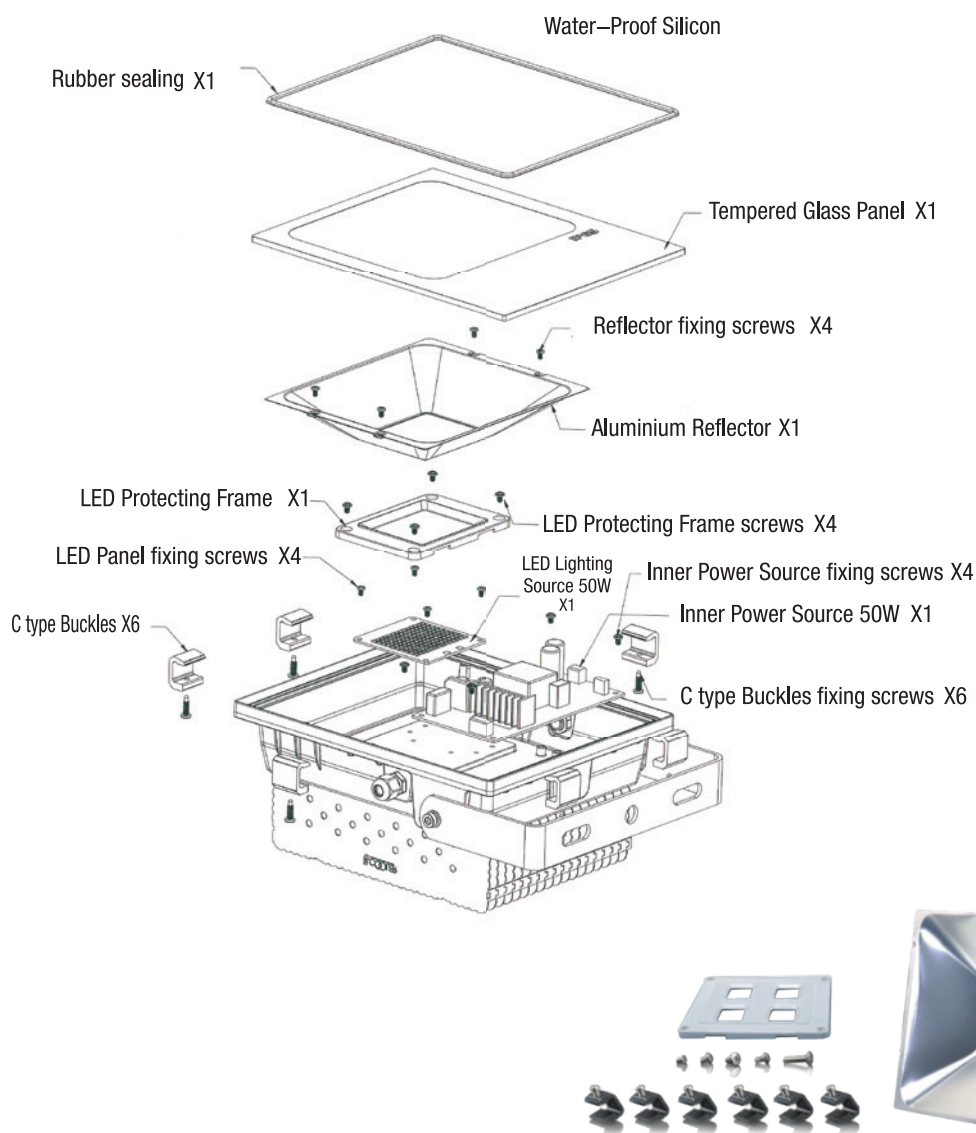

INNOVATIONS 創新 Respirator Design 呼吸器設計

Balance the different pressure between the atmosphere and the shell, it is water proof also defog and avoiding drop condensation and reducing the inside salt corrosion and extending try the product lifespan.

平衡環境和外殼之間不同的壓力，並具有防水防霧功能，可避免水滴凝結、減少內鹽腐蝕和延長產品壽命。






Weatherproof Square Flood Light 方形防水泛光燈

MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	WEIGHT 重量	PACKING 包裝
LED Weatherproof Square Flood Light 方形防水泛光燈 - 20W*					
LFLD-20WDL	6500K	2000lm	>80	1.3Kg	10pcs/ctn.
LFLD-20WCW	4000K	1900lm			
LFLD-20WW	2700K	1800lm			
LED Weatherproof Square Flood Light 方形防水泛光燈 - 30W*					
LFLD-30WDL	6500K	3000lm	>80	1.5Kg	10pcs/ctn.
LFLD-30WCW	4000K	2850lm			
LFLD-30WW	2700K	2700lm			
LED Weatherproof Square Flood Light 方形防水泛光燈 - 50W*					
LFLD-50WDL	6500K	5000lm	>80	2.5Kg	4pcs/ctn.
LFLD-50WCW	4000K	4750lm			
LFLD-50WW	2700K	4500lm			
LED Weatherproof Square Flood Light 方形防水泛光燈 - 100W*					
LFLD-100WDL	6500K	10000lm	>80	5.0Kg	1pcs/ctn.
LFLD-100WCW	4000K	9500lm			
LFLD-100WW	2700K	9000lm			
LED Weatherproof Square Flood Light 方形防水泛光燈 - 150W*					
LFLD-150WDL	6500K	15000lm	>80	7.0Kg	1pcs/ctn.
LFLD-150WCW	4000K	14250lm			
LFLD-150WW	2700K	14000lm			
LED Weatherproof Square Flood Light 方形防水泛光燈 - 200W*					
LFLD-200WDL	6500K	20000lm	>80	10Kg	1pcs/ctn.
LFLD-200WCW	4000K	19000lm			
LFLD-200WW	2700K	18500lm			



* Indent Order 需預訂

Weatherproof Flood Light
防水泛光燈



WATT 瓦數		20W	30W	50W	100W	150W	200W
SIZE 呎吋	A	203mm	219mm	282mm	310mm	364mm	465mm
	B	176mm	192mm	220mm	268mm	298mm	344mm
	C	64mm	64mm	113mm	182mm	187mm	197mm



- Multi adjustable angle with fasten screw
多角度調教並配備定位螺絲
- ADC12 Aluminum casing for effective heat dissipation
外殼用上 ADC12 鋁料，有助散熱
- Ultra slim and lightweight design from 25mm to 40mm thick
纖巧輕盈設計，厚度僅由 25mm 至 40mm
- Tempered glass 鋼化玻璃
- Weatherproof IP65 rating 達IP65 防水級別
- With microwave / light sensor selection
備有微波 / 光感感應器款式




LED Weatherproof Slim Flood Light

LED 纖巧防水泛光燈



MODEL 型號	CT 色溫	WATT 瓦數	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Weatherproof Slim Flood Light 纖巧防水泛光燈					
LLFL-10WDL	6500K	10W	900lm	>70	40pcs/ctn.
LLFL-10WW*	2700K		850lm		
LLFL-20WDL	6500K	20W	1800lm	>70	20pcs/ctn.
LLFL-20WW*	2700K		1700lm		
LLFL-30WDL	6500K	30W	2700lm	>70	10pcs/ctn.
LLFL-30WW*	2700K		2550lm		
LLFL-40WDL	6500K	40W	3600lm	>70	10pcs/ctn.
LLFL-40WW*	2700K		3400lm		




Weatherproof Slim Flood Light 纖巧防水泛光燈					
WATT 瓦數		10W	20W	30W	40W
SIZE 呎吋	A	130mm	185mm	230mm	270mm
	B	95mm	135mm	168mm	190mm
	C	41mm	44.5mm	47mm	47mm

MODEL 型號	CT 色溫	WATT 瓦數	LUMENS 流明	CRI 顯色度	PACKING 包裝
-------------	----------	------------	--------------	------------	---------------

NEW LED Duo Sensor Weatherproof Slim Flood Light 雙重感應纖巧防水泛光燈

LLFL-30WMS-DL	6500K	30W	2700lm	>70	10pcs/ctn.
LLFL-30WMS-WW	2700K		2550lm		
LLFL-40WMS-DL	6500K	40W	3600lm	>70	10pcs/ctn.
LLFL-40WMS-WW	2700K		3400lm		

- A combination of micro sensor and lighting sensor. 備有微波感應及光控功能於一體
- Adjustable micro sensing distance (3-8 meters), auto light off timer (2 seconds -5 minutes) and environment lighting sensitivity level (2-500 lux)
可自由調教微波感應距離 (3-8 米)、延時關燈時間 (2 秒 -5 分鐘) 及環境光度感應值 (2-500lux)
- Farther and wider (180°) sensing distance when compare with infrared sensor
比紅外 產品的感應距離更遠及闊 (180°)
- No extra space for lens installation is needed. 不需額外開孔加裝透鏡
- Not influence by temperature, dust, etc. and more durable. 不受環境 度、灰塵等影響，更耐用



Duo Sensor Weatherproof Slim Flood Light 雙重感應纖巧防水泛光燈			
WATT 瓦數		30W	40W
SIZE 呎吋	A	230mm	270mm
	B	168mm	190mm
	C	47mm	47mm
	D	45mm	45mm
	E	70mm	70mm

IEC 62471

CE

IP65

25,000
Hours

110°
WIDE ANGLE

220V-240V~
50/60Hz

UP TO
85%
ENERGY
SAVINGS


NO
UV/IR

SAFE
EASY TO USE

RoHS
Compliant

SAFE
EASY TO USE

SAFE
EASY TO USE



INNOVATIONS 創新 **Respirator Design** **呼吸器設計**

Balance the different pressure between the atmosphere and the shell, it is water proof also defog and avoiding drop condensation and reducing the inside salt corrosion and extending try the product lifespan.

平衡環境和外殼之間不同的壓力，並具有防水防霧功能，可避免水滴凝結、減少內鹽腐蝕和延長產品壽命。

* Indent Order 需預訂

Weatherproof Slim Flood Light
纖巧防水泛光燈



- Integration punching aluminum design, well heat dissipation, fast surface drainage
一體化壓衝鋁外殼設計，加強散熱能力、排水能力高，方便清潔
- Apply to courtyard, landscape, building out wall etc.
適用於庭園、園林、建築外牆等
- 180° adjustable mounting bracket
180° 可調節安裝支架




LED Weatherproof Multi Function Flood Light

LED 多功能防水泛光燈



MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
NEW LED Weatherproof Multi Function Flood Light 多功能防水泛光燈 - 50W*				
LFML-50W-DL	6500K	5000lm	>80	40pcs/ctn.
LFML-50W-WW	2700K	4000lm		
NEW LED Weatherproof Multi Function Flood Light 多功能防水泛光燈 - 80W*				
LFML-80W-DL	6500K	8000lm	>80	20pcs/ctn.
LFML-80W-WW	2700K	7000lm		
NEW LED Weatherproof Multi Function Flood Light 多功能防水泛光燈 - 120W*				
LFML-120W-DL	6500K	12000lm	>80	10pcs/ctn.
LFML-120W-WW	2700K	11000lm		

WATT 瓦數		50W	80W	120W
SIZE 呎吋	A	240mm	300mm	360mm
	B	208mm	260mm	312mm
	C	48mm	91mm	94mm




Recommended Fixture 推介燈具:

Spike-mounted Luminaire 插泥燈具




Model No 型號: LFML-SM

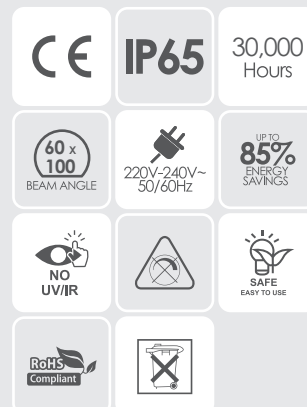

Weatherproof Multi Function Flood Light
多功能防水泛光燈

* Indent Order 需預訂

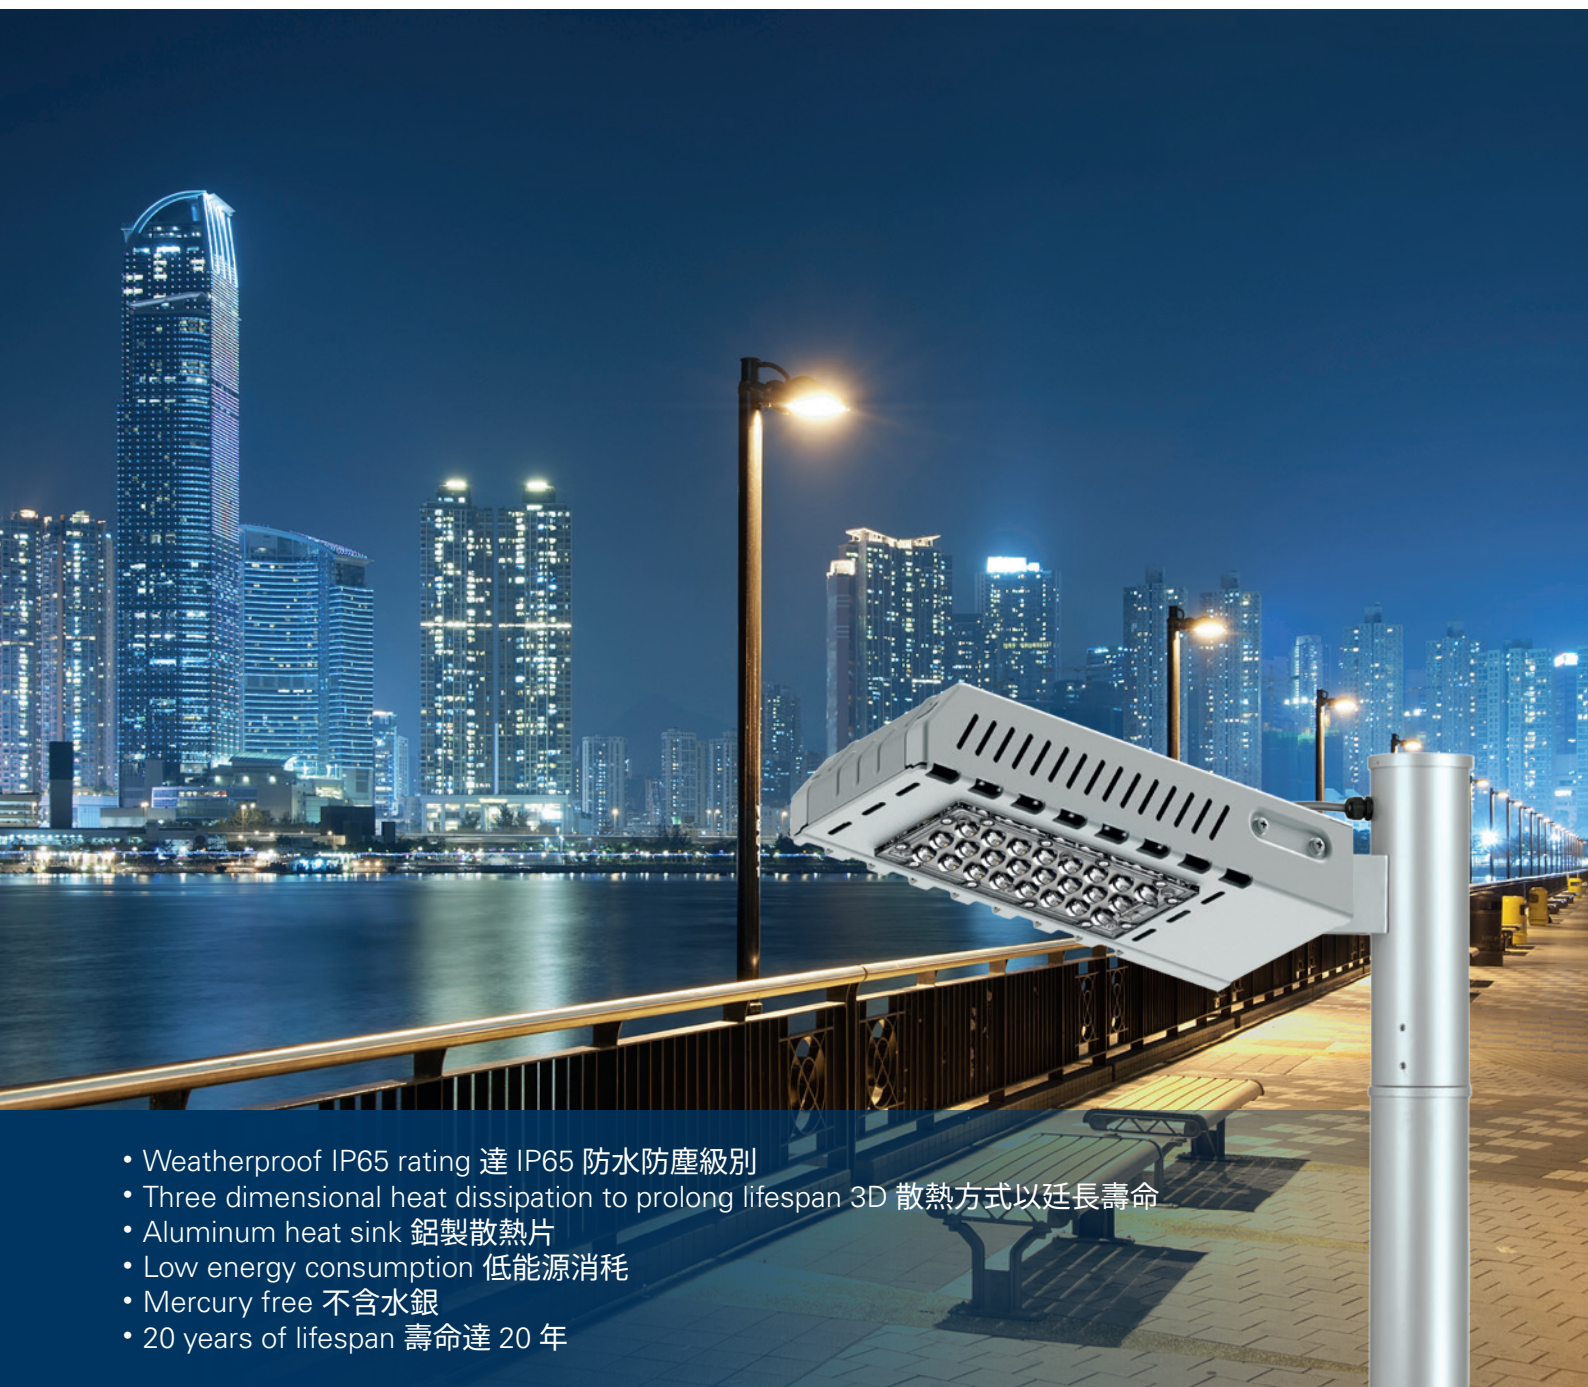

- Weatherproof IP65 rating 達 IP65 防水防塵級別
- Three dimensional heat dissipation to prolong lifespan 3D 散熱方式以延長壽命
- Aluminum heat sink 鋁製散熱片
- Low energy consumption 低能源消耗
- Mercury free 不含水銀
- 20 years of lifespan 壽命達 20 年



LED Street Light LED 街道燈





MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Street Light 街道燈 - 30W*				
LSL-30WDL	6500K	3650lm	>80	8pcs/ctn.
LSL-30WCW	4000K	3550lm		
LED Street Light 街道燈 - 50W*				
LSL-50WDL	6500K	5150lm	>80	8pcs/ctn.
LSL-50WCW	4000K	5050lm		




* Indent Order 需預訂


Structure 結構:

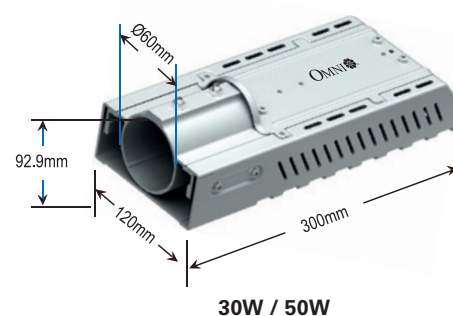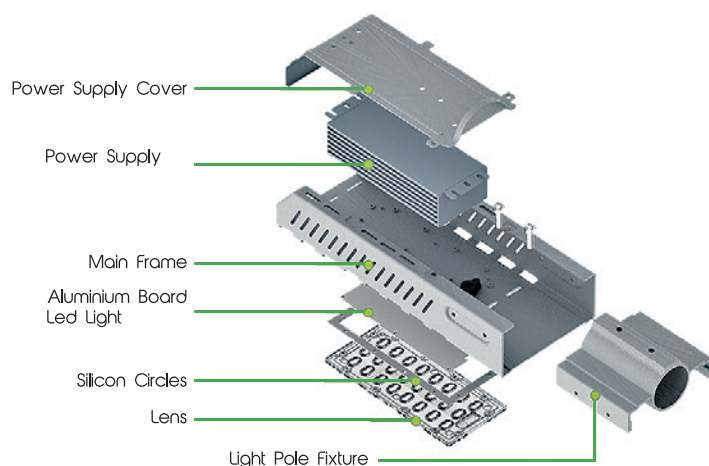

INTENSITY DISTRIBUTION DIAGRAM

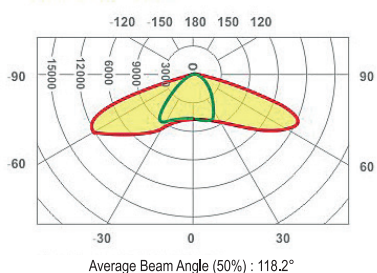

PLANAR ILLUMINANCE CURVE





- Weatherproof IP65 rating 達 IP65 防水防塵級別
- Precise lens application for better light distribution 精準的透光鏡使光 分佈更好
- Low energy consumption 低能源消耗
- Mercury free 不含水銀
- 40,000 hours operations 運作可達40,000 小時




LED Road Light LED 公路燈





MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
NEW LED Road Light 公路燈 - 60W*				
LRL-60WCW	4000K	6000lm	>80	1pcs/ctn.
LRL-60WWW	2700K	5000lm		
NEW LED Road Light 公路燈 - 100W*				
LRL-100WCW	4000K	10000lm	>80	1pcs/ctn.
LRL-100WWW	2700K	8500lm		
NEW LED Road Light 公路燈 - 150W*				
LRL-150WCW	4000K	15000lm	>80	1pcs/ctn.
LRL-150WWW	2700K	12000lm		
NEW LED Road Light 公路燈 - 200W*				
LRL-200WCW	4000K	20000lm	>80	1pcs/ctn.
LRL-200WWW	2700K	17000lm		

IEC 62560	IEC 62471	IEC 62493
CE	220V-240V~ 50/60Hz	150° WIDE ANGLE
IP65	>0.9 Power Factor	40,000 Hours
UP TO 85% ENERGY SAVINGS	20 YEARS OF LIFE	NO UV/IR
	SAFE EASY TO USE	RoHS Compliant
	3 YEAR WARRANTY	

* Indent Order 需預訂



WATT 瓦數		60W	100W	150W	200W
SIZE 呎吋	A	156mm	240mm	240mm	280mm
	B	380mm	570mm	684mm	816mm

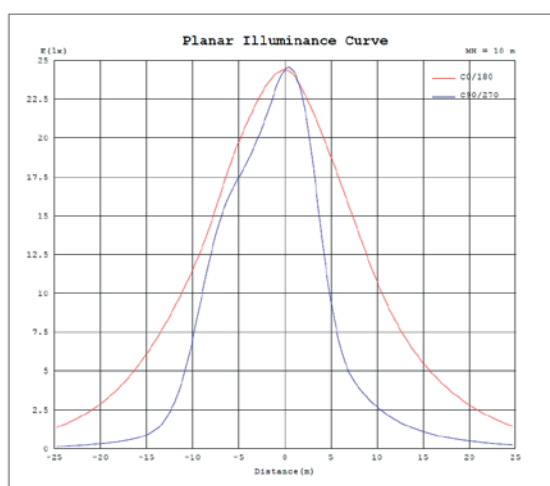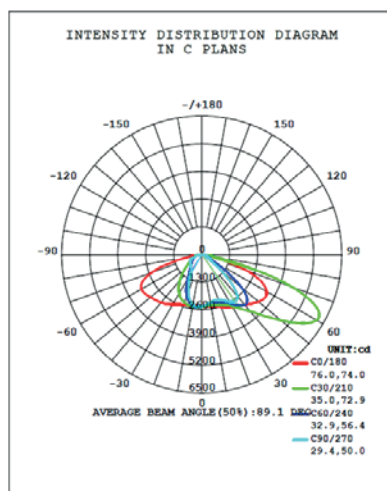



- Highly-pure aluminum housing with FIN design in IP65, elevate heat-sink performance
高純度鋁外殼，能提高散熱功能，並達 IP65 防水級別
- Mercury free 不含水銀
- 40,000 Hours of operation 壽命可達 40,000 小時




LED Tunnel Light LED 隧道燈






MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	PACKING 包裝
LED Tunnel Light 隧道燈 - 150W*				
LTL-150W-DL	6500K	13500lm	>80	1pcs/ctn.
LED Tunnel Light 隧道燈 - 200W*				
LTL-200W-DL	6500K	16300lm	>80	1pcs/ctn.
LED Tunnel Light 隧道燈 - 250W*				
LTL-250W-DL	6500K	27500lm	>80	1pcs/ctn.

WATT 瓦數		150W	200W	250W
SIZE 呎吋	A	356mm	448mm	540mm
	B	317mm	317mm	317mm
	C	130mm	130mm	130mm






Installation 安裝:

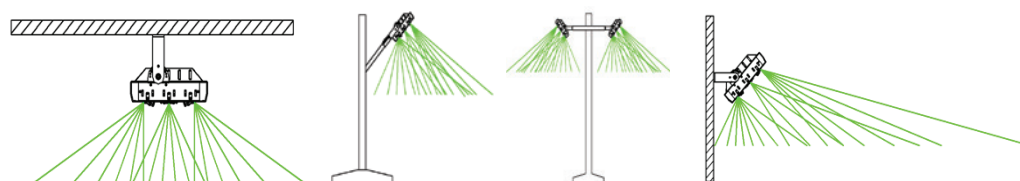

* Indent Order 需預訂

Structure 結構:

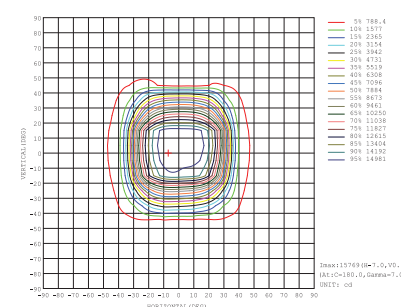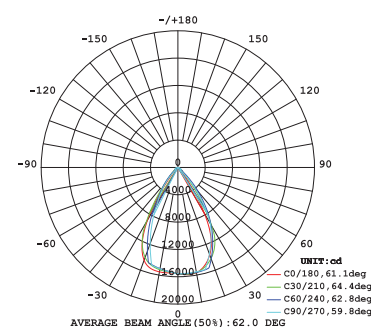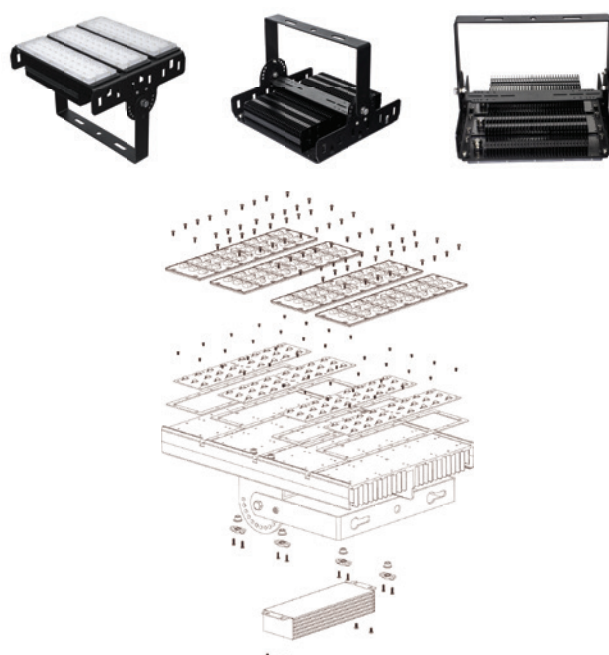

60*60°



- Conforms to HKFSD Licensing and Certification Command
符合香港消防處牌照及審批總區
- Automatic operation (turns on instantly when power is cut-off)
自動運作 (電源供應終斷時立刻啟動)
- Equipped with overcharging protection
配備過度充電保護裝置
- Fuse protected 保險絲保護



LED Automatic Emergency Light

LED 自動應急燈



MODEL 型號	AEL-3038*
NEW LED Twin Heads Automatic Emergency Light 貓頭鷹式自動應急燈	
BATTERY 電池	Sealed Lead-Acid 4V4.0Ah 鉛酸密封式 4V4.0Ah
CHARGING TIME 充電時間	20 Hrs 小時
PERFORMANCE TIME 運作時間	6 Hrs 小時
INPUT VOLTAGE 輸入電壓	220V
OUTPUT 輸出功率	3W
LIGHTING WATT 燈源瓦數	2 x 1W
CASING MATERIAL 外殼物料	Fire resistant ABS material with metal material 防火 ABS 材料及金屬外殼
TESTING STANDARD 測試標準	HKFSD Licensing and Certification Command [PPA/104(A)4th revision] 香港消防處牌照及審批總區 [PPA/104(A) 第四次修訂]
SIZE 呎吋	280mm x 75mm x 270mm



MODEL 型號	AEL-319*
NEW LED Ceiling Type Automatic Emergency Light 天花式自動應急燈	
BATTERY 電池	Sealed Lead-Acid 4V4.0Ah 鉛酸密封式 4V4.0Ah
CHARGING TIME 充電時間	20 Hrs 小時
PERFORMANCE TIME 運作時間	6 Hrs 小時
INPUT VOLTAGE 輸入電壓	220V
OUTPUT 輸出功率	3W
LIGHTING WATT 燈源瓦數	2 x 1W
CASING MATERIAL 外殼物料	Fire Resistant ABS material with Metal material 防火 ABS 材料及金屬外殼
TESTING STANDARD 測試標準	HKFSD Licensing and Certification Command [PPA/104(A)4th revision] 香港消防處牌照及審批總區 [PPA/104(A) 第四次修訂]
SIZE 呎吋	365mm x 65mm x 180mm



MODEL 型號	LEDX-701HK*
NEW LED Emergency Exit Sign Box LED 緊急出口指示燈	
BATTERY 電池	Sealed Lead-Acid 4V4.0Ah 鉛酸密封式 4V4.0Ah
CHARGING TIME 充電時間	20 Hrs 小時
PERFORMANCE TIME 運作時間	3 Hrs 小時
INPUT VOLTAGE 輸入電壓	220V
OUTPUT 輸出功率	8W
LIGHTING WATT 燈源瓦數	5W
CASING MATERIAL 外殼物料	Metal material 金屬外殼
TESTING STANDARD 測試標準	HKFSD Licensing and Certification Command: Fire Service (Installation and Equipment Regulations) (Cap.5.10) 香港消防處牌照及審批總區：消防裝置及設備守則 5.10 文件
SIZE 呎吋	410mm x 65mm x 165mm
AVAILABLE FILM 膠片款式	EXIT 出口 / Turn Left 轉左 / Turn Right 轉右



Automatic Emergency Light
自動應急燈

* Indent Order 需預訂



- A variety of battery capacity with compat design is available, specially fit for narrow space
電池容量選擇多且輕巧，方便應用於狹小空間
- External emergency battery box is suitable for most of the luminaires
可搭配外置應急電池盒，方便應用於大部份燈具
- T8 Emergency batten set are available with different tube sizes and battery hours
另備 T8 支架，可自由選擇所需應急時數及光管

Emergency Battery 應急電池





MODEL 型號	mAH 毫安 / 小時	WEIGHT 重量	WATT 瓦數	SIZE 呎吋	PACKING 包裝
-------------	----------------	--------------	------------	------------	---------------

NEW 100%Power Emergency Battery 100% 功率應急電池 - 2hr 小時 *

CRB-2-10W	12V 2200mAh	700g	10W	168mm x 40mm x 30mm	10pcs/ctn.
CRB-2-20W	12V 4400mAh	1000g	20W	168mm x 40mm x 30mm	
CRB-2-25W	12V 6600mAh	1200g	25W	168mm x 40mm x 30mm	

NEW 100%Power Emergency Battery 100% 功率應急電池 - 3hr 小時 *

CRB-3-10W	12V 4000mAh	700g	10W	168mm x 40mm x 30mm	10pcs/ctn.
CRB-3-20W	12V 6600mAh	1000g	20W	168mm x 40mm x 30mm	
CRB-3-25W	12V 8800mAh	1200g	25W	168mm x 40mm x 30mm	

NEW 30%Power Emergency Battery 30% 功率應急電池 - 2hr 小時 *

CRB30-2-10W	12V 2200mAh	700g	10W	168mm x 40mm x 30mm	10pcs/ctn.
CRB30-2-20W	12V 4400mAh	1000g	20W	168mm x 40mm x 30mm	
CRB30-2-25W	12V 6600mAh	1200g	25W	168mm x 40mm x 30mm	

NEW 30%Power Emergency Battery 30% 功率應急電池 - 3hr 小時 *


CRB30-3-10W	12V 4000mAh	700g	10W	168mm x 40mm x 30mm	10pcs/ctn.
CRB30-3-20W	12V 6600mAh	1000g	20W	168mm x 40mm x 30mm	
CRB30-3-25W	12V 8800mAh	1200g	25W	168mm x 40mm x 30mm	

* Indent Order 需預訂



Recommended Fixture 推介燈具:

External Emergency Battery Box* 外置應急電池盒*



MODEL 型號	SIZE 呎吋
External Emergency Battery Box 外置應急電池盒	
EBB-260	260mm x 60mm x 60mm
EBB-330	330mm x 75mm x 75mm

T8 Emergency batten Set T8應急支架套裝



MODEL 型號	SIZE 呎吋	EMERGENCY BATTERY 應急電池	TUBE 光管
T8 Single Tube Emergency batten Set T8 單管應急支架套裝			
T8-F2	620mm x 38mm x 32mm	free combination with the above battery 自由搭配以上電池	Matching with T8 Tube listed on P.15-20 可搭配本目錄內 P.15-20 的 T8 光管
T8-F4	1230mm x 48mm x 32mm		
T8-F5	1520mm x 48mm x 32mm		
T8 Double Tube Emergency batten Set T8 雙管應急支架套裝			
T8-TF2	620mm x 78mm x 32mm	free combination with the above battery 自由搭配以上電池	Matching with T8 Tube listed on P.15-20 可搭配本目錄內 P.15-20 的 T8 光管
T8-TF4	1230mm x 78mm x 36mm		
T8-TF5	1520mm x 78mm x 36mm		



- Modern stylish design 現代時尚設計
- Sensitive touch switch 輕觸式感應開關
- Soft and comfortable illuminance suitable for reading and eye protection
柔和舒適的光，適合閱讀並保護眼睛



LED Eye Protection Table Lamp

LED 護眼檯燈



Lite Breeze NEW



**Bladeless Fan
無扇葉風扇**
improves ventilation
改善室內空氣流通



Wireless Design 無 計設


with 2,200mAh rechargeable battery, can work with USB charger / battery bank
內置 2,200mAh 儲電池, 可連接 USB 供電或儲電池無 供電



**3 colors temperature modes
三色溫模式**



**Stepless dimmer
無段調光**




Eye Protection 護眼

Passes (IEC 62471). No UV / harmful light emitted. No flicker & glare
通過 IEC62471, 不含紫外線 / 有害光源, 沒有頻閃及眩光




Timer 計時

Pre-set 10-minute switch off timer
10 分鐘定時關機功能



MODEL 型號	CT 色溫	LUMENS 流明	WATT 瓦數	CHARGING TIME 完全充電時間	PERFORMANCE TIME 電池續航力
DEL-9031	6500K	Fan On 使用風扇: 200lm	Lamp 檯燈: 6W	2.5 hr. 小時	Fan 風扇: ~4 hr. 小時
	4000K	Fan Off 不使用風扇: 220lm	Fan 風扇: 3W		Lamp 檯燈: ~4 hr. 小時
	3000K				Fan + Lamp 風扇+檯燈: ~2 hr. 小時

Énergie NEW



USB charging 5V 1A
USB 輸出 5V 1A



2 levels brightness
2 段光暗可選



6000mAh lithium battery, perform up to 12 hours
6000mAh 鋰電池能使用達 12 小時



Foldable design, handy and portable
可摺疊設計, 方便攜帶及使用



Come with 3 in 1 USB Cable
附送 3 合 1 USB 電線

MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	WATT 瓦數
AEL-300	6500K	210lm	>80	2.1W 21pcs SMD LED

Features 特點:



Eye and Skin Protection
保護眼睛及皮膚

Passes IEC 62471, No harmful light,
UV and IR
通過 IEC62471, 不含紫外線及紅外線



Energy saving
節能環保

LED Desk lamp consume less energy
and providing a higher brightness level
with lower wattage.
LED 檯燈瓦數低, 光度高, 能節省電源



Even light emitted, anti-glare
光線均勻、防眩眼

Soft and comfort colour temperature
4000K can prevent glare
4000K 色溫的光線柔和舒適, 防止眩光
問題




No Flicker
無閃頻

Prevent eye from tiredness
不會令眼睛疲勞




Litan

- Multi-adjustable angle 多角度調整
- Sensitive touch switch 輕觸式感應開關
- Dimmable 3 brightness range 三段調光




Black 黑

MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	WATT 瓦數
DEL-0040	4000K	480lm	>80	5W

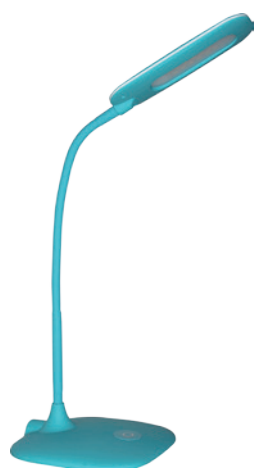

Greni

- Free turning direction lampshade 燈罩可調教任何角度
- Sensitive touch switch 輕觸式感應開關
- Dimmable 3 brightness range 三段調光



Blue 藍
White 白

MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	WATT 瓦數
DEL-0074	4000K	420lm	>80	5W




Gemlite **NEW**

- Simple design, easily matches with modern interior design
設計簡潔輕巧，易於融入各式家居設計
- Low wattage and more durable
床頭燈用上低瓦數 LED 燈珠，比傳統床頭燈更耐用



Amethyst



Pearl




Ruby



Sapphire



MODEL 型號	CT 色溫	LUMENS 流明	CRI 顯色度	WATT 瓦數
DEL-1650	4000K	160lm	>80	2.5W

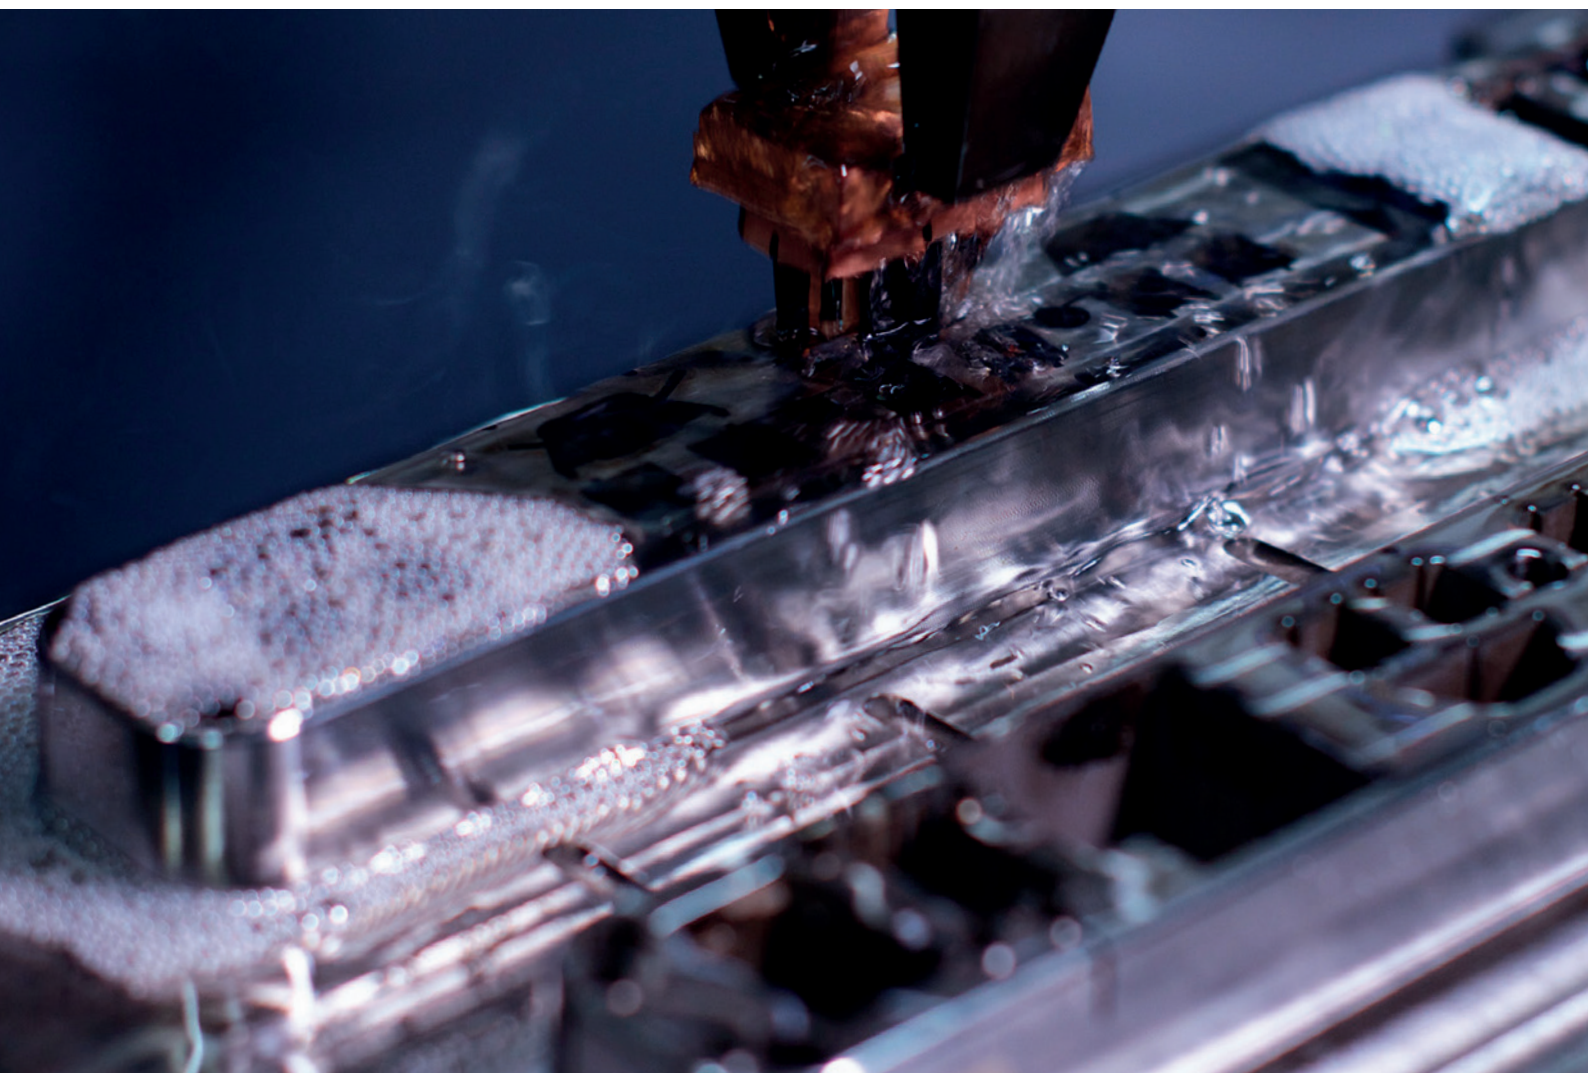

- Safety standard complied to BS1363-2
通過香港安全標準 BS1363-2
- Power cord conforms to BS6500 standard, not easy to be intenerated and distorted
電源線符合 BS6500 安全標準，不易軟化及變形
- 6 Safety features
6 大安全特點



Safety Extension Sockets 安全拖板



Safety Product Features 安全特點:



Safety standard complied to BS1363-2
通過香港安全標準 BS1363-2



Power cord conforms to BS6500 standard, not easy to be intenerated and distorted
電源線符合BS6500安全標準，不易軟化及變形



PC Alloy Casting: Max. fire resistance 750°C resistance to pressure & humidity
高質合金塑料外殼，耐熱、耐壓、防潮、耐高、阻燃高達750°C



Silver alloy touch point switch, high endurance and low heat elevation
銀鍍合金觸點開關，耐用、減低發熱火花



Children safety shutter
兒童安全保護門

MODEL 型號	SOCKET 插蘇位	CABLE LENGTH 電綫長度	PACKING 包裝
Safety Extension Sockets 安全拖板			
UK020-9	2	9 呎	12pcs/ctn.
UK030-9	3		
UK040-9	4		
UK050-9	5		
UK060-9	6		

More Features from USB 更多USB特點:






USB port conforms to IEC 62680 standard
USB通過IEC62680安全標準



Total USB output = 5V-3.1A
USB總輸出=5V-3.1A

MODEL 型號	SOCKET 插蘇位	USB CHARGER USB 充電	CABLE LENGTH 電綫長度	PACKING 包裝
Safety Extension Sockets with USB 安全拖板連 USB				
UK043-10	4	3	10 呎	12pcs/ctn.

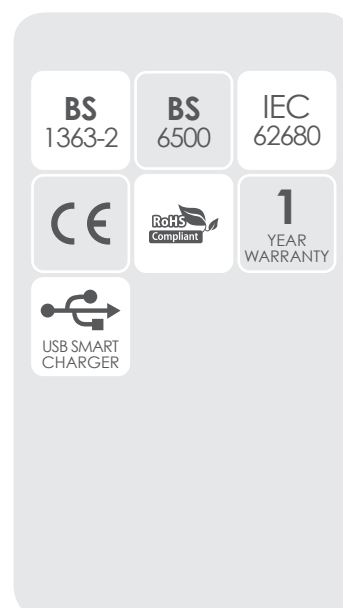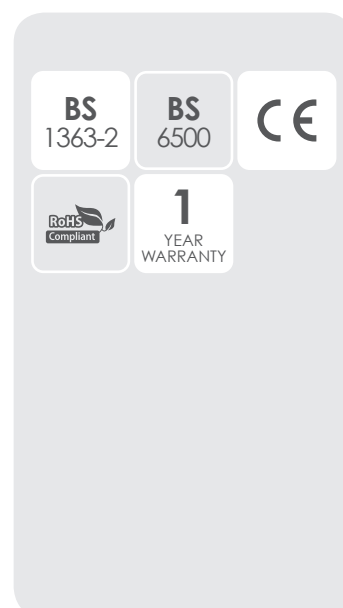

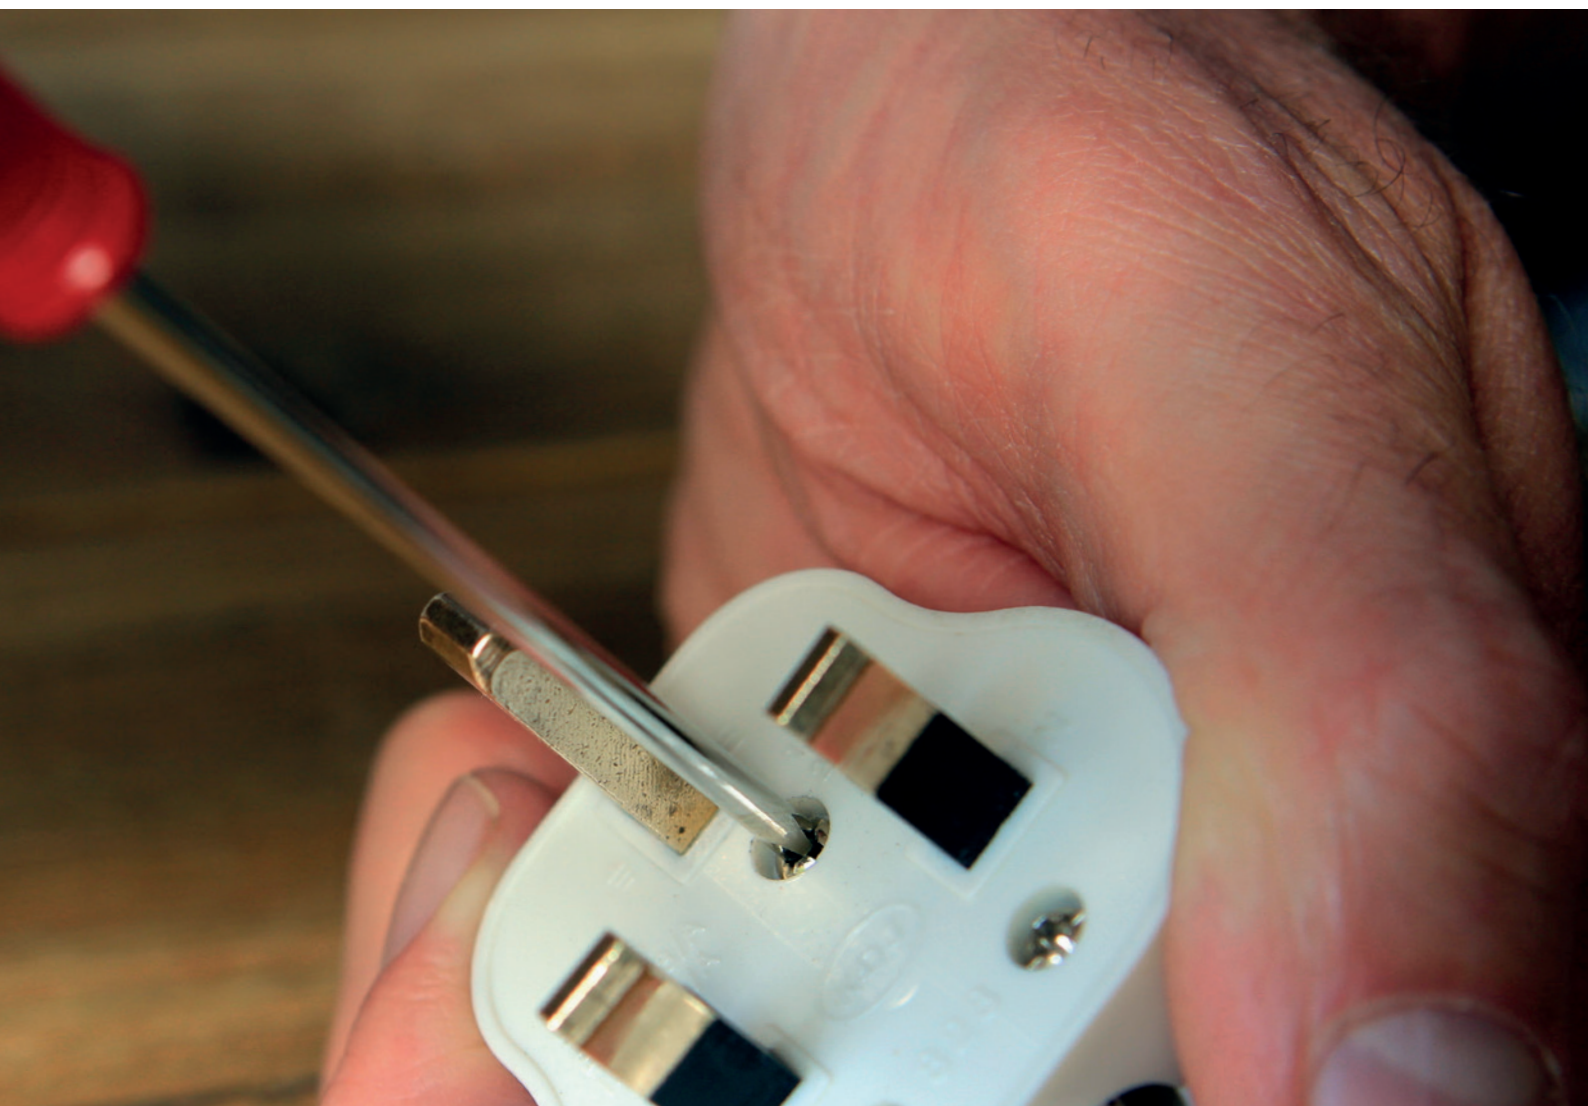

- Insulation plug 絕緣插腳
- Built-in fuse BS1362 內附 BS1362 保險絲
- Compliance with British Standard BS 1363A
符合英國標準 BS 1363A
- Made from ABS anti-breakage plastic
使用 ABS 不碎膠



13A British Standard Sockets **13A 英國標準插頭**



13A British Standard Sockets 13A 英國標準插頭:



Model No 型號: UKP-301



Model No 型號: UKP-302



Model No 型號: UKP-501



Model No 型號: UKP-502



Model No 型號: UKP-001



Model No 型號: UKP-002



Model No 型號: UKP-202



Model No 型號: UKP-214

IEC
60950





- Portable and convenient design of 2 / 3 pieces in 1 with storage case
設計輕巧方便，1 套包含 2 / 3 件配件置於收納盒內
- Universal adapter works in most country worldwide
環球轉插能適用於大部份國家
- Built-in safety shutters with fuse protect
內置兒童安全保護門及保險絲


Universal Travel Adapter 環球旅行轉插



Remarks: These Models are not for HK market
備註：此產品不適用於香港市場




MODEL 型號	額定輸入電壓 Rated Input Voltage	PACKING 包裝
Universal Travel Adapter 環球旅行轉插		
WUA-004	3A 250V-6A125V-50/60Hz	120pcs/ctn

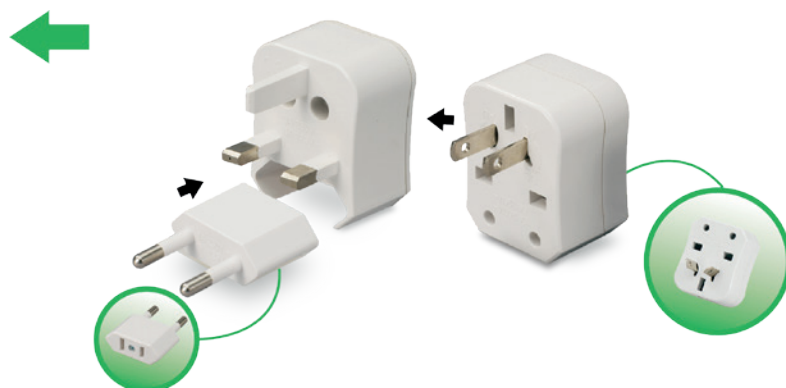

禮品及贈品

可供絲印商標
Logo printing service - available

MODEL 型號	額定輸入電壓 Rated Input Voltage	PACKING 包裝
Universal Travel Adapter with USB 環球旅行轉插帶 USB		
WUA-005	3A 250V-6A125V-50/60Hz	60pcs/ctn

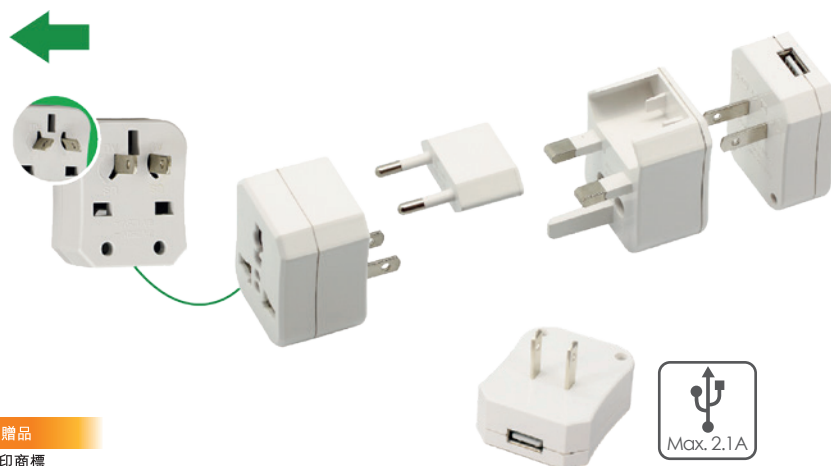

禮品及贈品

可供絲印商標
Logo printing service - available



Europe, Australia,
New Zealand,
Asia, Indonesia,
Philippines, Vietnam,
South Korea, Africa.



China, Mongolia,
South-East Asia,
Thailand, Australia,
New Zealand, Part of
South America.



USA, Canada, Japan,
Taiwan, Caribbean
Islands, Part of South
America.



United Kingdom,
Ireland, Singapore,
Malaysia, Hong Kong,
Macau, Middle East.

Symbol Index 標籤索引

The International Electrotechnical Commission (IEC) Standard
國際電工委員會認證

The world's leading organization that prepares and publishes International Standards for all electrical, electronic and related technologies

全球領先的認證組織，為所有電器、電子及相關技術制定及出版國際標準

IEC 60061 Lamp caps and holders together with gauges for the control of interchangeability and safety.
燈頭、燈座及量度器互換性和安全控制。

IEC 60598 General requirements for luminaires, incorporating electric light sources for operation from supply voltages up to 1000V.
對於一般燈具的要求，及對供電電源不超過 1000V 的特定類型燈具詳細要求。

IEC 60950 Applicable to mains-powered or battery-powered information technology equipment with a rated voltage not exceeding 600 V.
適用於主電源或電池電源資訊產品 (含商業電子設備) 及其週邊產品，且額定電壓低於 600V。

IEC 61347 Particular safety requirements for electronic controlgear.
電子控制裝置的特殊安全規範。

IEC 62031 LED modules for general lighting - safety specifications.
LED 模塊用於普通照明 - 安全規範。

IEC 62471 Photobiological safety of lamps and lamp systems.
燈和燈系統的光生物安全性。

IEC 62493 Assessment of lighting equipment related to human exposure to electromagnetic fields.
用以評估人體暴露在照明設備所造成的空間電磁場允許值標準。

IEC 62560 Safety and interchangeability requirements intended for domestic and similar general lighting, which rated below 60W and range from 50V up to 250V.
用於家庭及類似環境的普通照明安全性和互換性要求，此燈具不高於 60W 並由 50V 到 250V。

IEC 62680 Standard for power delivery system covering all elements of a USB system including: Hosts, Devices, Hubs, Chargers and cable assemblies.
涵蓋 USB 系統所有元件的供電系統標準，包括：主機，驅動器，集線器，充電器和電線組件。

IEC 62776 Double-capped LED fluorescent lamps - safety specifications.
雙端 LED 光管 - 安全規範。

IEC 62778 The standard for assessment of blue light hazard to light sources and luminaires.
針對光源和 具所發出的藍光危害評估標準。

CE European Conformity Mark - Standard for the product that complies with the essential requirements of the relevant European health, safety and environmental protection legislation.
歐洲統一標誌 - 產品符合歐洲健康、安全及環保法規的基本標準。

BS 1363-2 A Safety Standard for 13 A plugs, socket-outlets, adaptors and connection units.
13 A 插頭，插座，適配器和連接單元的安全標準。

BS 6500 A Safety Standard for Electric cables. Flexible cords rated up to 300/500 V.
電線安全標準，其額定功率可高達 300/500 V。

NO UV/IR No ultraviolet and infrared rays.
不含紫外線及紅外線。

RoHS Compliant Restriction of the use of certain hazardous substances
禁止使用數種有害物質。

WEEE Recycling Logo - prevents careless disposal of electrical products.
歐盟 WEEE 回收標誌 - 禁止消費者隨意丟棄廢電子電機產品。

10 YEARS OF LIFE 10 years of life computed at 5 hours per day when used in right condition.
10 年壽命是指在正常使用情況下，每天使用 5 小時計算。

20 YEARS OF LIFE 20 years of life computed at 5 hours per day when used in right condition.
20 年壽命是指在正常使用情況下，每天使用 5 小時計算。

Dimmable Dimmable bulb (appropriate dimmer is needed).
可調光燈膽 (需搭配適當調光器)。

Non-dimmable bulb.
非調光燈膽。

IP44 Standard for protection against solid objects and liquids
對抵禦固體及液體程度之標準
First Digit 第一個數字
“4” protected against most wires, screws, tools over 1mm
可抵禦超過 1.0 毫米的固體物質，如細小金屬絲

“6” totally protected against dust
能完全抵禦塵埃
Second Digit 第二個數字
“4” protected against water splashing the enclosure from any direction
可抵受從任何方向射來的水花
“5” protected against low pressure jets of water from all directions
可抵受來自所有方向的低壓水柱噴射

Authorized Distributor



YATAI INTERNATIONAL CORPORATION

Yatai Tower, 2673-C, Rafael Alunan Street,
Interior Road, Malate, Manila, Philippines

Tel. No.: +63-2-567-0000 Fax. No.: +63-2-567-2342

Email: info@yatai.com.ph

www.omni.net.ph

OMNI ELECTRICAL (HK) CO. LTD.

Room D, 18/F, Blk. 1, Vigor Ind. Bldg.,

49-53 Ta Chuen Ping St., Kwai Chung, Hong Kong

Tel. No.: +852-2305-4478 Fax. No.: +852-3971-0647

Email: sales@omni-hk.com

www.omni-hk.com

OMNI ELECTRICAL AND LIGHTING (AUSTRALIA) PTY., LTD.

17 Lacey St Croydon Vic 3136 Australia

Tel. No.: +61-1300-333-001 Fax. No.: +61-1300-333-002

Email: sales@omni-au.com

www.omni-au.com

YATAI (CHINA) ELECTRICAL CO., LTD.

5th Floor, No.5 Building, Guanyinshan International
Business Park, Siming District, Xiamen, China

Tel. No.: +86-592-5058882 Fax. No.: +86-592-5033882

Email: lighting@yataichina.com

www.omni-china.com